

Fil Cerone Director of Sustainability, Environment & Planning Sydney Metro 680 George Street Sydney, NSW, 2000

11/08/2021

Dear Mr Cerone

Sydney Metro - Chatswood to Sydenham (SSI-7400) Waterloo Interchange Access Plan

I refer to the Waterloo Interchange Access Plan (IAP) which was submitted in accordance with Condition E92 of the approval for the City and South West Chatswood to Sydenham project (SSI-7400).

The Department has carefully reviewed the document and is satisfied that it:

- has adopted the modal hierarchy consistent with the principles defined in the EIS
- was prepared in conjunction with the Station Design and Precinct Plan
- was prepared in consultation with the Design Review Panel, Traffic and Transport Liaison Group, City of Sydney Council and Transport for NSW
- has been reviewed by an independent consultant and found to be satisfactory, and
- has addressed the conditions of approval.

Accordingly, as nominee of the Planning Secretary I approve the Waterloo Interchange Access Plan (Version 3.18, dated July 2021). Please ensure that the approved plan is placed on the project website at the earliest convenience.

You are reminded that if there is any inconsistency between the Waterloo Interchange Access Plan and the conditions of approval, then the requirements of the conditions of approval will prevail.

If you wish to discuss the matter further, please contact Grant Brown at grant.brown@dpie.nsw.gov.au

Yours sincerely

an muyton

Jake Shackleton Director – Infrastructure Management

As nominee of the Secretary



Interchange Access Plan

Waterloo



City & Southwest

July 2021 Version 3.18

Contents

1.0	Introduction	1
2.0	Interchange and transfer planning	3
3.0	Consultation	13
4.0	Interchange Access Plans planning conditions	17
5.0	Regional context	21
6.0	Waterloo – local context	25
7.0	Waterloo – interchange and transfer requirements overview	29
8.0	Waterloo – operations, maintenance and management provisions	41
9.0	Modal Hierarchy Review	45
10.0	Waterloo - actions	47

Sydney Metro respectfully acknowledges the traditional owners and custodians of this great land and we pay our respects to Elders past, present and future, extending this respect to all Aboriginal and Torres Strait Islander peoples.

Cover: Waterloo Station entrance facing Cope Street Right: Waterloo Station Concourse

Please note the information provided in this document was correct at the time of publication, being July 2021, and may have since changed. For any updates to information, please contact Sydney Metro at 1800 171 386 or at sydneymetro@transport.nsw.gov.au.







1.0 Introduction

Cope Street Plaza

1

1.0 Introduction

1.1 Sydney Metro

Sydney Metro has four core components:

Metro North West Line

Services started in May 2019 in the city's north west between Rouse Hill and Chatswood, with a metro train every four minutes in the peak. The project was delivered on time and \$1 billion under budget.

Sydney Metro City & Southwest

The Sydney Metro City & Southwest project includes a new 30 kilometre metro line extending metro rail from the end of the Metro North West Line at Chatswood, under Sydney Harbour, through he Sydney CBD and southwest to Bankstown. It is due to open in 2024 with the ultimate capacity to run a metro train every two minutes each way through the centre of Sydney.

Sydney Metro City & Southwest will deliver new metro stations at Crows Nest. Victoria Cross. Barangaroo, Martin Place, Pitt Street, Waterloo and new underground metro platforms at Central Station. In addition it will upgrade and convert all 11 stations between Sydenham and Bankstown to metro standards

Sydney Metro West

Sydney Metro West is a new underground railway connecting Greater Parramatta and the Sydney CBD. This once-in-a-century infrastructure investment will transform Sydney for generations to come, doubling rail capacity between these two areas, linking new communities to rail services, and supporting employment growth and housing supply between the two CBDs.

Sydney Metro West stations have been confirmed at Westmead, Parramatta, Sydney Olympic Park, North Strathfield, Burwood North, Five Dock, The Bays, Pyrmont, and the Sydney CBD.

Sydney Metro - Western Sydney Airport

Metro rail will also service Greater Western Sydney and the new Western Sydney International (Nancy Bird Walton) Airport. The new railway line will become the transport spine for the Western Parkland City's growth for generations to come, connecting communities and travellers with the rest of Sydney's public transport system with a fast, safe and easy metro service. Six new stations will be delivered at St Marys, Orchard Hills, Luddenham, Airport Business Park, Airport Terminal, and Western Sydney Aerotropolis. The Australian and NSW governments are partners in the delivery of this new railway.

Additional information can be obtained from the Sydney Metro website at www.sydneymetro.info.

1.2 Sydney Metro City & Southwest objectives

The objectives of Sydney Metro are to:

- Improve the quality of the transport experience for customers.
- Provide a transport system that is able to satisfy long-term demand.
- Grow public transport patronage and mode share.
- Support the productivity of the Eastern Economic Corridor.
- Improve the resilience of the transport network.
- Improve the efficiency and cost effectiveness of the public transport system.

1.3 Interchange Access Plan

The Interchange Access Plan has been developed by applying broad transport and access standards, guidelines, principles and strategies to the specific physical and operating environment of the interchange. It consolidates the requirements and aspirations for good customer transfer and identifies potential barriers or risks to achieving them, considering anticipated patronage and movement

patterns once metro services are in operation.

The Interchange Access Plan sets out areas that are likely to require attention, either as part of the metro development or subsequently, and identifies the agency or stakeholder responsible for delivering improvements. Some improvements to infrastructure and operations will be made as a direct result of constructing the metro stations and associated works.


1.4 Purpose of the Plan

The Interchange Access Plan has been prepared to:

• Respond to the requirements of the Sydney Metro City & Southwest - Chatswood to Sydenham conditions of approval.



The Interchange Access Plan is provided to inform planning decisions. This document will be updated in response to station design as required.

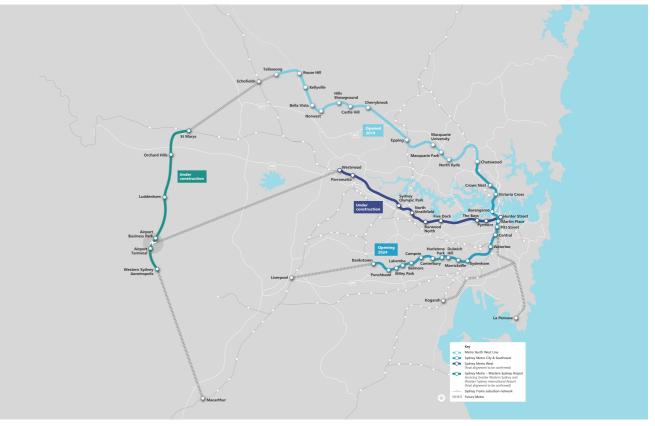

Sydney Metro

Provide detailed interchange deliverables.

• Inform the interchange design of transport and access facilities, including footpaths, cycle paths and bike parking, bus stops (temporary transport requirements considered), and car parking.

• Identify customer amenities, shelter, and road and traffic management required to ensure easy, accessible, safe and efficient customer transfer when services start in 2024.

• Provide a list of actions for delivery partners and other stakeholders to enable the implementation of an easy customer transfer which supports the project objectives.




2.0 Interchange and transfer planning

Waterloo Station Entry facing Raglan Street

2.0 Interchange and transfer planning

Transport for NSW (TfNSW) is responsible for ensuring the needs of the customer are at the centre of planning and decision making for the transport system, and that all projects and services are designed and operated accordingly. This is reflected in the TfNSW mission statement:

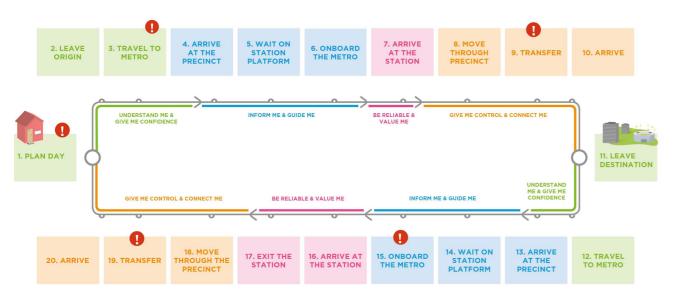

'The customer is at the centre of everything we do in transport.'

seamless and well integrated across all connecting modes and that there is easy and safe access to connect to/from the metro.

At each stage of the journey there are a number of touchpoints where the customer will interact with a TfNSW product, service, system or is interacting in one of TfNSW's spaces such as a station or an interchange or using one of TfNSW's modes. At these touchpoints the aim is to make it easy to interact as well as provide consistency in service delivery and information, such that it is easy for a customer to have a seamless journey.

The stations, interchanges, trains and complete travel experience all contribute to and will be integral goals.

Linking communities, schools, hospitals, key destinations and businesses with the new metro network is key in delivering the easy customer experience.

2.2 Sydney Metro customer principles

CUSTOMER PAIN POINT AT A HIGH LEVEL

Door-to-door-to-door experience for Sydney Metro

2.1 Customer-centred design

Sydney Metro aims to serve a diverse set of customers who will undertake a number of journeys throughout the day and week using the metro. The design and delivery of service is centred around the customer - their needs, behaviours, and their jobs to be done.

Sydney Metro's commitment is to deliver a reliable 'door-to-door' (from origin to destination and back again) transport solution, which is easy for all customers. This is through designing a seamlessly integrated experience with a focus on moving customers around safely, quickly and easily, and that is adaptive to change.

Providing services centred around the customer is key to Sydney Metro's ongoing success and building a solid customer base.

Customers expect the provision of a service that is on time, clean, safe, comfortable, efficient, convenient, has the right information and has adequate customer service. These basics are key drivers of customer satisfaction. Sydney Metro's goal is to deliver a level of service that goes beyond satisfaction, makes it easy for customers to use the metro and encourages repeat use across the multiple types of journeys they may make. This will support TfNSW's goal of increasing the number of journeys taken on public transport by the public, both in the peak and off-peak periods.

Sydney Metro provides a customer focus by addressing customer needs at all stages of the journey. A critical principle of Sydney Metro is that every effort will be made to make good connections to other modes, ensuring an easy and quick transfer. It is critical to customers that their journey is

1. WHAT CUSTOMERS NEED:

Understand Me \mathbf{O} Demonstrate awareness and appreciation of my needs, wants and requirements.

Give Me Confidence

Give me confidence that I can trust Sydney

Metro will help me to easily navigate the service and get me to my destination and back home safely.

4. HOW CUSTOMERS WANT TO FEEL:



Empower me with the necessary knowledge and ability to make choices so I can be in control of my situation.

Connect Me

Enable easy connections to the places I want to go so I can be closer to my community and to people that are important to me.

Sydney Metro customer principles

to the customer experience. A high-quality transport product is critical to attracting and retaining customers, and also to meeting broader transport

The Sydney Metro customer principles inform the design, development and operation of the services, products, systems and spaces to enable customers to have an easy and safe customer experience.

2. WHAT THE SERVICE **MUST OFFER:**

Inform Me

Make information (both physical and digital) easy to find and understand so I can make informed decisions.



Guide Me

Show me the best way to get to where I want to go so I can navigate my trip with the least amount of stress or uncertainty.

3. HOW THE ORGANISATION MUST DELIVER THE SERVICE:

Be Reliable

Provide me with a consistent and reliable experience that won't hold me up or get in the way of where I need to go.



Value Me

Provide effective solutions that respect and value me, my time and my needs.

2.3 An integrated customer journey

Customers see their journey from 'door-to-door-todoor' and may plan and use multiple travel modes throughout their journey in order to achieve their tasks. It is critical to customers that their journey is seamless and well integrated across all connecting modes, and that access to/from the metro from other modes is easy, efficient and safe.

The Sydney Metro customer journey map captures the touchpoints in a customer's journey from door (origin – planning the day) to door (destination) to door (return to origin). Key customer satisfaction drivers and customer principles that are important to customers have been noted at each journey stage. The satisfaction drivers indicate the service attributes that customers consider most important, what customers believe represents value, and the elements of the transport experience that contribute to customer satisfaction. Customer experience of the transport system is made up of two core elements - the functional benefit and the experience of the journey itself. Customer Value Proposition research suggests there are a number of broad factors that encourage people to use public transport. These factors reflect the trade-offs customers consider when making their travel choices and indicate known customer 'pain points' that impact customer interaction with public transport. Sydney Metro must ensure that these elements are well understood in order to deliver products, services, systems and stations that match customer needs and increase its customer base.

2.4 Interchange functionality and role

Sydney Metro will facilitate a diverse range of trips, providing not only a fast journey to work but also encouraging trips for other purposes such as access within the Sydney's north-west, Sydney's Eastern Economic Corridor, the north-west business park, local or business trips, access to universities and educational institutions, and service and recreational USes

In order to facilitate a range of trips across the multitude of destinations Sydney Metro stations will act as both origins and destinations for these trips. Each station will vary to the extent that it is a trip origin or destination throughout the day. The diagram on this page shows the diverse range of trips to a variety of land use categories.


In general, stations with high levels of surrounding employment and/or educational institutions, such as Victoria Cross, Pitt Street or Macquarie University, tend to be destination stations in the morning peak period.

Stations with high surrounding residential areas, such as Cherrybrook and Dulwich Hill, tend to be origin stations in the morning peak period. This trend reverses in afternoon as people return to their homes

Other functional and node based characteristics of interchanges along the corridor including centres that both generate significant volumes of trips (origins from the catchment) as well as trips with destinations in or near the centre. This is typically associated with its positioning of the station within the overall network, as well as its proximity, density and importance of the surrounding land uses and in the centre it serves. Examples are Castle Hill, Crows Nest and Waterloo, where these stations have both significant residential catchments and employment zones that generate opposing two way flows through the stations during typical weekday peak periods.

The final interchange characteristic is that which has a significant internal transfer role between transport modes with a focus on connecting services for customer journeys across Sydney. These network nodes are functionally important and critical for supporting the delivery of efficient and seamless travel across the transport network. In some cases, the major design changes occur internally with only minor modifications to station access points, connections and facilities. Factors such as its historical establishment and its role in continuing to support growth in public transport use as well as in shaping an urban centre are also key considerations. Examples are Central, Chatswood and Sydenham, where these stations sit at critical decision making points in established areas of Sydney for travel

across the network. In these situations its focused on providing customers with the opportunity to connect between rail to rail, or metro or light rail lines. In less established locations, the focus may be on bus to metro connectivity or commuter parking.

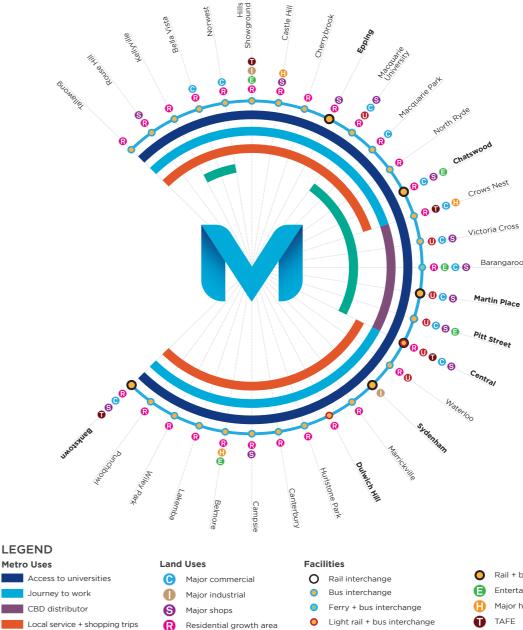

Sydney Metro trip diversity and accessibility

Local core employment area trips

to the station.

Examples of this include Tallawong, Rouse Hill and Kellyville where customers key travel choices are based around these modes and the design is driven by these modal considerations that may be external

- Light rail + bus interchange
- Rail + light rail + bus interchange

0	Rail + bus interchange
Θ	Entertainment/Recreation
0	Major hospital
Ū	TAFE
Ф	University

2.5 Modal hierarchy

Designing an efficient interchange requires the allocation of space to different users, according to TfNSW's modal hierarchy. Wherever possible, this hierarchy aims to prioritise transfers from more equitable and sustainable modes, such as walking and cycling, over vehicle-based modes, including the provision of supporting infrastructure. The modal hierarchy used in this plan is consistent with the transport planning principles defined in the Environmental Impact Statement (EIS).

Due to the location of each station, particularly within the Sydney CBD, in general, metro customers are not expected to access the station by driving their car. No car parking is to be provided at any of the metro stations between Chatswood and Sydenham and no additional parking will be provided between Sydenham and Bankstown.

Every arrival or departure from each station will be as a pedestrian – either from the precinct or after transferring from or to connecting modes.

Consideration is given to accessible facilities for all modes of travel. The design of the interchange aims to prioritise customers with accessible requirements.



Modal hierarchy

Transport mode	Description

Transport mode	Description
Walking and cycling	Walking and cycling are the highest priority access modes as they are the most sustainable, cost-effective, e bicycle riders have the lowest environmental impact and (typically) require the least amount of space, while urban and commercial viability.
	For stations located within established urban areas, walking and cycling access will be predominantly along require upgrade. Additional new paths and routes may also be required. For stations located within new or cadditional new paths and routes may be proposed.
	The interchange must provide safe, easy, quick, direct, continuous, high-quality, clearly signposted and acce other modes for connecting and transferring customers.
	A safe and well-defined pedestrian connection shall be provided from the station entry/exit to the nearest for Pedestrian routes within the station and interchange shall be clear, direct, unimpeded, accessible, provide for and facilitate easy circulation. Pedestrian risks within the station and interchange shall be reduced by highlig finishes, special lighting or tactile paving.
	Pedestrian networks in and around the station must encourage walking, cater for forecast demand, mi provide safe access to the station and other modes for all (including older people, and people with you greater safety and mobility needs) in line with <i>Disability Discrimination Act 1992</i> (DDA) requirements. Th open 24 hours a day (or as long as metro is operating).
	Pedestrian infrastructure shall be designed to accommodate modeled volumes/demands and to protect ped accordance with relevant Australian Standards, and Austroads and NSW Government guidelines.
	For bicycle riders, the interchange must provide safe and clear bicycle access in the vicinity of the station, si stations, in order to encourage cycling to Sydney Metro.
	Cycle routes must be of a high quality outside the stations, be designed to accommodate forecast user dem Standards and Austroad Guidelines, and be safely integrated with the local network.
	The station must enable through-access to allow for bicycles to be taken on metro trains. Cycleways need to and parked cars in accordance with Austroads Guidelines and NSW Government directions.
	Bicycle access and bike parking must be provided at all stations in accordance with Australian Standards, Au directions.
Rail	Customer transfer from rail services will occur between platforms at Epping, Chatswood, Martin Place, Cent these stations clear and intuitive wayfinding should be provided to ensure an easy customer transfer. At othe stations and use existing footpaths to connect to other rail stations.
	Sydney Metro interchanges shall incorporate accessible facilities, and safe, accessible paths of travel betwee platforms, in accordance with the <i>Disability Standards for Accessible Public Transport 2002</i> (DSAPT).
Light rail, bus and ferry	Transfer to other public transport modes is a high priority in station planning. These services expand the effe Seamless and safe transfer is required in order to encourage linked trips within the public transport network Sydney Metro interchanges shall incorporate accessible facilities and safe, accessible paths of travel between facilities, in accordance with the DSAPT.
Coaches	Transfer to coaches is the next highest priority after public transport in station planning. Coach services pro NSW destinations. Safe transfers between coaches and the connecting public transport services and/or sur high level customer experience.
	Sydney Metro interchanges shall incorporate accessible facilities and safe, accessible paths of travel between accordance with the DSAPT.

, equitable and accessible. Pedestrians and e they also contribute to personal safety,

g existing paths and routes, which may developing urban development areas,

cessible access between the station and

footpath on the adjacent street network. For clear sight lines and passive surveillance, ighting all hazards with high-contrast

ninimise delays crossing roads, and oung families and disabilities, who have 'hrough-site links to stations should be

edestrians from other road users in

signage and bike parking facilities at

mands in accordance with Australian

to be separated from vehicles, pedestrians

Austroads Guidelines and NSW Government

ntral, Sydenham, and Bankstown stations. At her stations customers will need to exit the

een Sydney Metro platforms and other rail

ffective catchment area of Sydney Metro. rk.

en station and light rail, bus and ferry

rovide connection to major city and regional urrounding land use is important to ensure a

en the station and the coach facility, in

Transport mode	Description
Taxi	Taxis are the highest priority of the car-based modes, supplementing the public transport system for access to destinations separated from the public transport network. Taxi access and parking should be provided at all stations, with shelters, seating and taxi
	 providers' contact details. Taxi zones are to be visible and well signposted, and located where taxis can depart easily in most directions to reduce any unnecessary travel to reach the passenger's destination. Sydney Metro interchanges shall incorporate accessible facilities, and accessible paths of travel between station and taxi facilities, in accordance with the DSAPT.
Kiss-and-ride	Kiss-and-ride is the preferred mode of those accessing the station by private vehicle, but a relatively low priority. Kiss-and-ride supports the concept of car sharing, trip chaining and ride sharing, reducing the number of single-occupant trips, and, in some instances, parking demand. Kiss-and-ride spaces are to be provided where safe and efficient vehicle access and high vehicle turnover is available, as part of kerbside parking or within station car parks closest
	to the station. Kiss-and-ride in CBD areas will not be provided for exclusively, but could occur in existing short-term parking zones. Access must be safe and easy for vehicles to enter and exit, minimising conflicts with pedestrians, cycles, buses and other vehicles. Ridesharing services, such as GoCatch and Uber, will use kiss-and-ride zones to pick up
	and drop off passengers. Sydney Metro station interchanges shall incorporate accessible facilities and accessible paths of travel between station and kiss-and-ride facilities in accordance with the DSAPT.
Park-and-ride	Park-and-ride is the lowest priority of all modes. Given the high accessibility to sustainable transport modes in Sydney, formal parking facilities are only suggested outside of major centres. The stations between Chatswood and Sydenham will not include park-and-ride facilities and there is no additional car parking proposed for stations between Sydenham and Bankstown. For Sydney Metro North West line, due to the extent of likely station catchments and the nature of the local transport networks, 4,000 parking spaces were provided for metro customers at Tallawong, Kellyville, Bella Vista, Hills Showground and Cherrybrook stations.
	Access to parking areas should be located away from town centres where possible, with new parking areas accessible by a safe, well-lit footpath to enable customers to drive and catch the train. Parking areas should also be located and designed to minimise disruption to walking connections between town centres and the station.
	Car park layouts shall ensure safe and efficient entry, exit and circulation for pedestrians and vehicles. Car parks shall have clearly marked pedestrian circulation to achieve safe segregation of pedestrian pathways and vehicles in car parks. Car park access points shall be oriented away from station entries to avoid conflicts between pedestrians and vehicles.
	Park-and-ride shall be compliant with the Sydney Metro Northwest Parking Management Strategy and the Sydney Metro City & Southwest Parking Management Strategy.



Modes serving each station *No direct rail to metro interchange connection

Bus	Ferry	Coaches	Taxi	Kiss-and-ride	Park-and-ride
				fiel fiel fiel	
				⇔ 1	
				⇔ 1	
				@1	
			♠♠	a i	
				At At At	
				î	
				a 1	Ρ
				At At At At	P
				A	P P
				⇔ 1	Ρ
				⇔ 1	Ρ
				(Ρ
				a 1	Ρ
				æ⁄î	Ρ
				a 1	Ρ
				a i	Ρ

2.6 Legislative requirements and applicable guidelines

Sydney Metro stations and interchanges must comply with the following legislative requirements and guidelines.

Legislation or guideline	Description
Legislation	
Disability Discrimination Act 1992	Designated Sydney Metro stations and interchange facilities will be fully compliant with the Disability Discrimination Act 1992.
Disability Standards for Accessible Public Transport 2002	The purpose of <i>Disability Standards for Accessible Public Transport 2002</i> (Transport Standards) (DSAPT) is to enable public transport operators and pro people with disabilities from public transport services 'as far as possible'.
Strategy and policy	
Future Transport 2056	The strategy is an update of the 2012 NSW Long Term Transport Master Plan. It outlines a vision, strategic directions and customer outcomes. The strategy plays in the land use, tourism, and the economic development of towns and cities. It includes issue-specific and place-based supporting plans that focus individual modes of transport. The strategy also focuses on the role of transport in delivering movement and place outcomes that support the character of the future. The principles of this strategy have been applied in the development of this plan, including the six state-wide outcomes to guide the provision of intercha
	station with the future strategic transport networks and consideration of future changes in technology and innovation affecting customer transfers. Future Zero vision by creating a safe system road environment that is free from fatalities and reduces serious injury. Safe integration of metro stations within the this commitment around metro stations.
Eastern City District Plan	Prepared by the Greater Sydney Commission (GSC), the <i>Eastern City District Plan</i> is a 20-year plan to manage growth in the context of economic, social a 40-year vision for Greater Sydney. It contains the planning priorities and actions for implementing the <i>Greater Sydney Region Plan: A Metropolis of Three</i> between regional and local planning.
	The Eastern City District covers the Bayside, Burwood, City of Canada Bay, City of Sydney, Inner West, Randwick, Strathfield, Waverley and Woollahra loo
	The content of the strategy has been considered in this plan by examining the context of the station in relation to the surrounding regional land uses and strategic and metropolitan centres, and connectivity to transport networks including rail, light rail and road corridors.
Sydney City Centre Access Strategy	The strategy outlines how people will enter, exit, and move in and around the Sydney CBD over the next 20 years, and demonstrates how light rail, buses, cyclists will interact in the heart of Sydney. The strategy will also be updated to reflect current changes in an evolving plan that allows for the growth of S establishment of a multi-modal transport access plan for the city centre.
Guidelines	
Australian Standards	Standards relevant to construction, operation and maintenance of interchanges and all relevant modes. The relevant standards have been considered throughout the development of this plan and were used to guide the design development of the interchange provision of safe and efficient multi-modal interchange facilities.
Austroads guidelines	Austroads' levels of service (LoS) establish standards of performance for key infrastructure, based on its ability to accommodate forecast use and moven from A to F, in descending order of performance.
	Austroads guidelines were considered throughout the development of this plan, and were used to guide the design development process to provide safe
RMS Traffic and Transport Technical Directives	These documents are Roads and Maritime Services (RMS) complementary documents to the <i>Austroads Guide to Traffic Management</i> and the Australian The content of the directives were applied in conjunction with the relevant Austroads guidelines, and were incorporated in the design of the multi-modal facilities, and changes to the existing road layout.

roviders to remove discrimination against

egy acknowledges the vital role transport us on integrated solutions rather than er of the places and communities needed for

hange facilities, integration of the metro iture Transport also commits to the Towards he existing environment is key to achieving

al and environmental matters to achieve the e *Cities*, at a district level and is a bridge

ocal government areas. d growth precincts, linkages to local,

es, trains, ferries, cars, taxis, pedestrians and Sydney as a global centre through the

nge. The standards were used to ensure the

ements safely and efficiently. Levels range

fe and efficient interchange facilities..

n Standards AS1742, 1743 and 2890

al interchange facilities, such as crossing

Legislation or guideline	Description
Guidelines	
Local council guidelines	Interchange facilities must comply with relevant local council guidelines.
TfNSW Interchange Wayfinding Requirements	Sets out requirements for wayfinding in transport interchanges. A comprehensive wayfinding strategy for the interchange has been developed in accordance with the core principles of the wayfinding requirements as and controls to ensure that intuitive, clear and consistent signage is provided at the interchange.
TfNSW Interchange Planning Guidelines	Guidelines for the development of interchanges. These guidelines have been considered in the design of the interchange, to ensure high quality infrastructure and a safe and efficient service is provided t
Crime Prevention Through Environmental Design	Provides guidance on crime prevention strategies through the design of physical spaces. The content of this crime prevention strategy has been considered through the development of this plan, as demonstrated through the station and interc pedestrian plazas and additional public domain to improve pedestrian safety.
NSW Bicycle Guidelines	Provides guidance to assist in the planning and design of high-quality cycleways within the on-road and off-road environments. The guide should be read however it prevails for any differences. This plan responds to the relevant guidelines by incorporating the design principles in the delivery of bicycle facilities throughout and within proximity to and bicycle parking.
State Transit Bus Infrastructure Guide	Provides guidance to ensure the consistent delivery of safe and effective bus-related infrastructure across New South Wales. The key components of the guide have been considered throughout the development of this plan, including the planning of bus facilities and consideration interchange and transfer facilities.

Relevant TfNSW (formerly RMS) and DSAPT standards and guidelines were adhered to during the design of the interchange and will continue to be throughout the detailed design stages. In addition, the Design Review Panel (DRP) also considers accessibility requirements, TfNSW has been consulted on the IAP, and the design review process carried out by Sydney Metro comprises three stages.

2.7 Operations and maintenance

The station must provide access for operations and maintenance activities. Sufficient space shall be provided at stations for the accommodation of buses in the event of planned or unplanned disruption of normal operations.

Further detail regarding the operation and maintenance of the interchange can be seen in the operations, maintenance and management provisions, which fits within the TfNSW Interchange Operations and Maintenance Framework.

2.8 Defining the interchange area

The area to be included in the Interchange Access Plan has been determined by the particular local context of each metro station. The definition of the 'interchange' area reflects local pedestrian routes, circulation patterns and desire lines; land use and the level of activity around the station; relationships to other transport networks and modes; and the proximity of local access roads and routes.

The area to be considered as the interchange is effectively determined by:

- The current and likely demands for pedestrian access to the station entry/entries as currently proposed.
- Formal or informal bike routes and desire lines, in relation to the station entry/entries.

- The path of travel from the surrounding rail stations.
- The path of travel from the surrounding light rail stops.
- The path of travel from the surrounding bus stops.
- Current or planned taxi zones, ranks or stands, as well as informal customer drop-off/pick-up points from/to taxis.
- The anticipated propensity for, and location of, drop-off and pick-up of customers as passengers in private cars.
- Major destinations within the immediate catchment of the station, including over site development to be undertaken as part of the metro project.
- Where appropriate, transfer from other modes, including coaches.

as outlined by TfNSW, and outlines objectives

d throughout

erchange layout that includes the provision of

ead in conjunction with Austroads guidelines,

to the interchange, including bicycle paths

ation of the availability and quality of the

2.9 Terms and definitions

Term	Definition	Ownership/responsibility	The area where the stat and interchange interac with the local context
Station	The station building and all service facilities required for the operation of the metro, including the entries and exits, and under the direct responsibility of the contracted operator. The station is within the interchange area, and includes the area directly owned by TfNSW as part of Sydney Metro or Sydney Trains, including the ground plane that will be used for over station development, the licensed maintenance area, and any other areas required for station operation.	One or more of the following:Sydney Metro operator.TfNSW.Other transport operators.	inte The a publi to url
Interchange*	The area and assets that facilitate easy, safe and intuitive customer access to and egress from the public transport network, transfer between modes by accessible paths, entry to urban centres, and an efficient customer journey. The interchange includes the station (see above). The interchange can have multiple sites that may not be connected, and includes areas that are owned by other stakeholders.	 One or more of the following: Sydney Metro operator. TfNSW. Other transport operators. Local council. Private property owners. 	
Precinct	The area that influences and interacts with the station and interchange, within the local context. The interchange provides a transport access focal point for the precinct, serving key attractions and generating opportunities for land use change and place-making opportunities within the precinct. The precinct includes areas that are owned by other stakeholders.	One or more of the following:Local council.TfNSW.Private property owners.	3
Catchment	The station walking catchment is generally within an 800-metre walk of the station. For suburban stations the catchment and the precinct may be the same. For urban stations the precinct will generally be smaller than the catchment. The Project may seek greater catchment areas to assess specific outcomes, such as parking impacts on local streets.	One or more of the following:Local council.TfNSW.Private property owners.	
	The cycling catchment for Sydney Metro stations is taken as 2.5 kilometres, due to their proximity to each other and potential destinations along the network. This is a comfortable 10-minute bike ride for an average rider.		KEY Note: Station
* For Epping Ch	atswood Martin Place Central Sydenham and Bankstown stations	many customore will transfer	Rail station

* For Epping, Chatswood, Martin Place, Central, Sydenham and Bankstown stations, many customers will transfer within the boundaries of the station – both between Sydney Trains services and between Sydney Trains and Sydney Metro services. These Interchange Access Plans acknowledge the need to consider the broader principles of customer transfer as an integral part of station design.


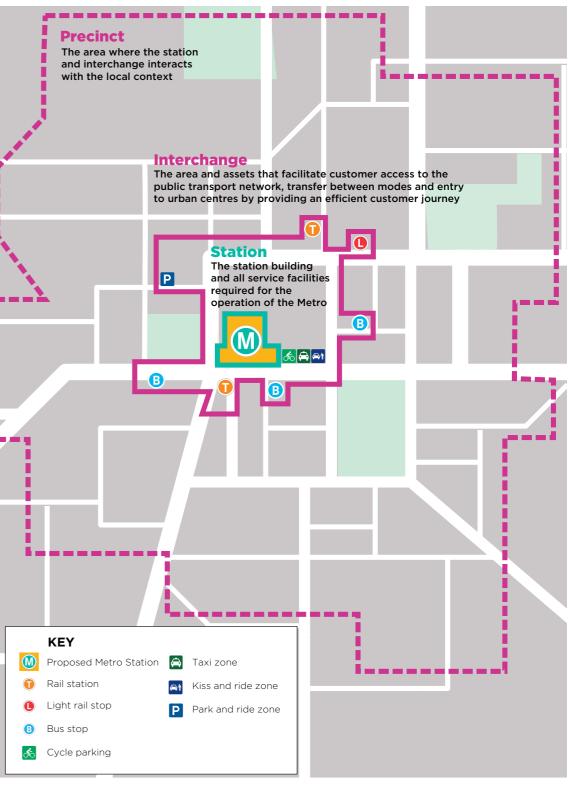


Illustration of terms and definitions

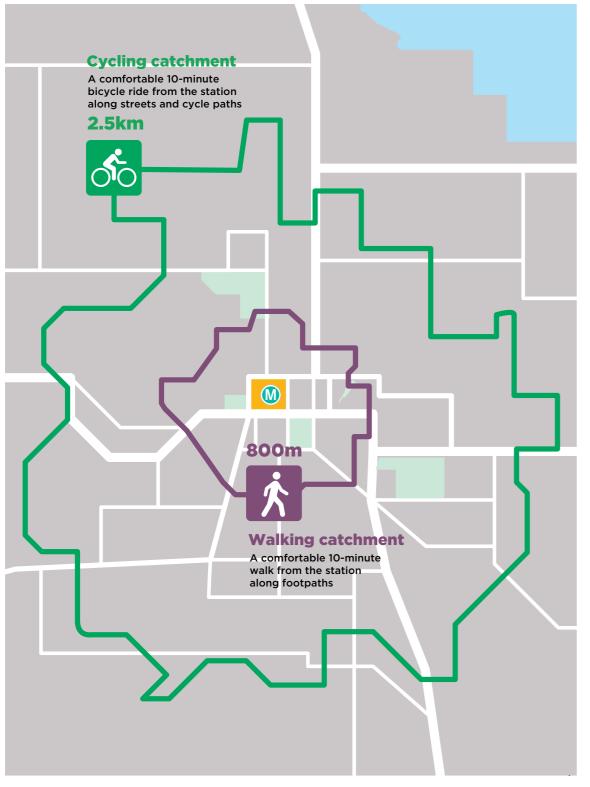

2.10 Design Development Process

Sydney Metro undertakes interchange planning by considering the role of the interchange and requirements and aspirations for an easy customer journey throughout the design process. As identified in the figure below, the interchange planning process broadly comprises three stages: interchange concept, interchange design and operational analysis, and interchange design refinement and action plan. This process is undertaken to align with the design development process and to effectively integrate planned facilities, plazas and connections with other planned station projects and precinct enhancements.

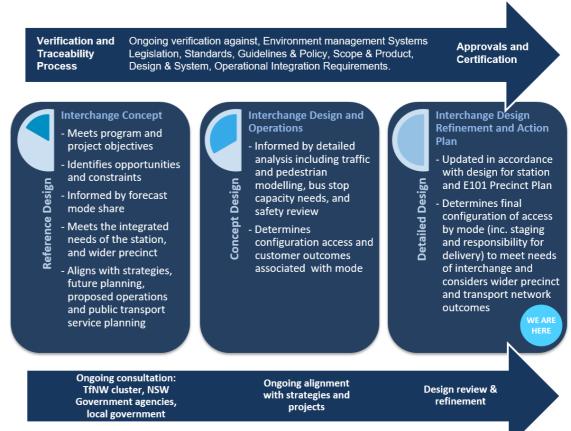


Illustration of terms and definitions

As part of the Critical State Significant Infrastructure (CSSI) Conditions of Approval (CoA) for the new metro platform, station entry and associated connections within Waterloo Station, the quality of the interchange design and its overall performance is required to be validated to support the detailed design development phase. The robustness of the design and its compliance to requirements, specification, standards and guidelines is verified at each design stage (refer to Figure below), and this design process captures technical design audits, safety assurance, safety-in-design and risk reviews. This process also captures continuous stakeholder inputs along with any required updates to transport modelling appraisals required to support road agency applications and approvals.



2.11 Consideration of Station Design and Precinct Plan

The Interchange Access Plan is developed in conjunction with the Station Design and Precinct Plan (SDPP). The SDPP highlights urban outcomes within the Waterloo Metro Quarter and enables other programs to develop the potential for wider place improvements. The IAP includes relevant items from the SDPP. For example, the IAP demonstrates urban and place making outcomes by identifying a new plaza that facilitates safe and comfortable movement through to interchange facilities. The SDPP equally considers items in the IAP, for example, by identifying pedestrian amenity and the kerbside facilities required to bring about an integrated customer journey. Refer to the following sections in the SDPP:

- Section 4.1 on design objectives, principles and standards
- Section 4.2 on public space and permeability
- Section 4.4 on urban design context.

2.12 Wayfinding

- environments.
- information.

are:

- car.

- possible.

All Sydney Metro interchanges aim to provide intuitive, clear and consistent information to make customer journeys more efficient. Effective wayfinding will help customers to navigate the space to reach their destination.

Legible wayfinding will ensure that all customers can travel independently and easily on Sydney Metro. This can be achieved by:

• Understanding customers needs.

• Providing accurate information at the right time.

• Planning and creating predictable and intuitive

• Applying a consistent system of signs and

Wayfinding will be available to customers when they

• Interchanging between services or modes.

• Connecting to and from public transport by walking, cycling, catching a taxi, being dropped off or picked up in private vehicle or parking in their

A clear wayfinding system will support pedestrian safety as it provides controlled and direct travel paths along the desire line within low speed environments. This will in turn protect them from other road users, allowing safe integration with existing transport networks.

The wayfinding will be visually simple, intuitive and consistent with TfNSW guidelines. It will contribute to an easy customer experience by:

• Providing visibility between station levels where

• Using intuitive design to minimise wayfinding choices and the need for signage.

• Providing safe, legible, efficient, convenient, obstruction-free, level, direct and attractive routes for customer access.



3.0 Consultation

Waterloo Station Platform

3.0 Consultation

Targeted consultation was undertaken for the Waterloo Station Interchange Access Plan (IAP) and included all major stakeholders. The consultation process involved the following steps:

- Organising briefing sessions with key stakeholders.
- Presenting the key elements of the IAP to stakeholders and allowing time for discussion.
- Distributing the IAP to any additional personnel identified during the briefing session for further review and comment.
- Reviewing comments received and incorporating feedback into the IAP where applicable.
- Responding to each stakeholder and seeking contentment with responses to be able to close out comments where applicable.

In many cases, pre-consultation sessions with key stakeholders were held to identify and resolve anticipated issues in advance of the formal consultation process. Furthermore, previous consultation was also undertaken with many stakeholders on the concept design of the station.

This section refers to the consultation undertaken during the detailed design process via various working groups and forums. The results are summarised here:

Forum/organisation	Meeting dates	Key Aspects
Design Review Panel	19/03/2021	Cope Street design features Confirmation of marked speed limit on Raglan Street and V
Traffic and Transport Liaison Group (TTLG)	24/03/2021 31/10/2018	Proposed transport interchange for Waterloo Station Bike hub, Cope Street design, Raglan Street bus stop alterr ramps
Waterloo Station and City of Sydney Design Meeting	5/05/2020 17/06/2020 19/06/2020 3/07/2020 23/11/2020 17/12/2020	Site overview and objectives, road network design, intersed connections, car parking, hostile vehicle mitigation Public domain, road network design, interchange design ar Hostile vehicle mitigation Flooding, road network design, water sensitive urban design Public domain and potential impacts to trees Road network and public domain design, and lighting
City of Sydney	28/08/2018 11/09/2018 20/11/2018 29/01/2021	Interchange planning and design, public domain, demand a crossings, Wellington Street cycleway, traffic signal phasing Intersection planning and design, and pedestrian modelling Wellington Street design Update on status of Waterloo IAP, purpose and overview o milestones
Sydney Metro and TfNSW Working Group • Planning and Programs • Customer Service Planning	04/11/2020 17/06/2020	Waterloo Precinct overview, road network design, intercha cycling connections Loading and servicing
TfNSW Design MeetingPlanning and ProgramsCustomer Service Planning	17/09/2020	Road network overview, design and layout, and placement
Customer Journey Planning meeting	09/11/2020 1/12/2020	Interchange design and layout, road network design, bus n Loading and servicing

d Wellington Street

ernative locations, investigation of kerb/pram

section design, walking and cycling

and layout

sign, and security bollards

d and pedestrian modelling, mid-block ng, and intersection upgrades ng

of the document contents, and key

nange layout design, and walking and

nt of interchange components

network planning, and bus operations

Consultation continued

This table summarises the presentations given to key stakeholders on the IAP and the main issues raised during each session.

Group/organisation	Feedback themes
City of Sydney	 Coordination is needed between the planning of Waterloo Metro Quarter, Land & Housing Commission, and the City of Sydney's vision. Acknowledge and consider: City of Sydney's vision for Cope Street. Safe-guard mid-block crossing at Botany Road. Pedestrian priority in signal phasing of signalised crossings on Botany Road. Speed limit reductions on Cope Street, Raglan Street, and Wellington Street are supported by City of Sydney. Balancing bus priority and heavy vehicle movements with anticipated volume of pedestrian needs. Placement of hostile vehicle management measures and consideration given to location close to building line or property boundary.
Customer Strategy and Technology, TfNSW	Ensure pedestrian connectivity and safety across Botany Road whilst considering the high traffic volumes. Consider bus stop locations that maximise catchment for all customers accessing the broader Waterloo precinct.
Planning and Programs, TfNSW	Consider suitability of mid-block crossing on Botany Road, grade separated crossing should be considered. Pram ramps at the Botany Road, Raglan Street and Henderson Road intersection are not up to current standards or compliant with DDA requirements.
Greater Sydney Division, TfNSW	Bus reliability and priority on Botany Road should be considered due to recent and forecasted increase in bus service levels. Ensure extent of the interchange boundary includes full length of bus stops on Raglan Street and Botany Road. Henderson Road and Raglan Street should be supported to become the main heavy vehicle route instead of Buckland Street and Wellington Street to er plans for the area.

ensure alignment with the medium term bus





4.0 Interchange Access Plans planning conditions



4.0 Interchange Access Plans planning conditions

The Minister for Planning granted approval to carry out Critical State Significant Infrastructure (Sydney Metro City & Southwest- Chatswood to Sydenham) on 9 January 2017, subject to conditions of approval. The Interchange Access Plans (IAP) requirements under these conditions of approval are outlined below.

Condition	Des	scription	Relevance in the document
E92	traf		the final design of transport and access facilities and services, including footpaths, cy round and at each station. The Interchange Access Plan(s) must consider walking and
	(a)	a station access hierarchy consistent with the transport planning principles defined within the EIS;	A modal hierarchy consistent with the principles defined in the EIS was adopted. Refer to Section 2.5: Modal hierarchy.
	(b)	safe, convenient, efficient and sufficient access to stations and transfer between transport modes (including subterranean connections and the safeguarding of additional entrances in response to land use change and patronage demand);	 Safe, convenient, efficient and sufficient access was considered for each travel mode in for future demand was also considered and included in the action plan. Refer to: Section 6.0: Waterloo - local context. Section 7.0: Waterloo - interchange and transfer requirements overview. Section 10.0: Waterloo - actions.
	(C)	the maintenance or improvement of pedestrian and cyclists level of service within a justified proximity to stations;	 The level of service for pedestrians and cyclists was considered and used to inform the crossings designs, cycleways, bike parking and other infrastructure. Refer to: Section 7.1: Walking interchange and transfer requirements. Section 7.2: Cycling interchange and transfer requirements. Section 10.0: Waterloo - Actions and the following Appendix A and Appendix B.
	(d)	current transport initiatives and plans;	 All current transport initiatives and plans were considered in the IAP development, inclupians and general transport design guidelines. Refer to: Section 2.6: Legislative requirements and applicable guidelines. Section 5.2: Related projects.
	(e)	opportunities and constraints presented by existing and proposed transport and access infrastructure and services;	Key opportunities and constraints affecting the design are presented in Section 6.6: Op
	(f)	patronage changes resulting from land use, population, employment, transport infrastructure and service changes;	Forecast patronage is presented in Section 6.0: Waterloo - local context and accounts f employment and are further outlined in Section 7.0: Waterloo - interchange and transfe Potential future service changes have informed the design process and the provision of
	(g)	integration with existing and proposed transport infrastructure and services;	The station and precinct has been designed to integrate effectively with existing and preservices for all travel modes. The interchange provides for safe and efficient transfer to Refer to Section 7.0: Waterloo - interchange and transfer requirements overview for fur provisions within the interchange area (except those excluded in Section 6.4: Modes with
	(h)	pedestrian, cycle, bus, taxi, vehicle and emergency vehicle access and parking infrastructure and service changes;	Access for all modes has been accounted for and has considered potential service char Refer to Section 7.0: Waterloo - interchange and transfer requirements overview for fur provisions within the interchange area (except those excluded in Section 6.4: Modes wit is accommodated within the station's adjacent kerbside spaces.
	(I)	legislative requirements and applicable guidelines;	All applicable legislation, standards and guidelines were used in the development of the Legislative requirements and applicable guidelines.

cycleways, passenger facilities, parking, nd cycling catchments and take into

in the development of the IAP. Safeguarding

he design of pedestrian thoroughfares and

cluding state government strategies, Council

Opportunities and constraints.

s for future land use, population and fer requirements overview. of interchange facilities.

proposed transport infrastructure and to all modes in close proximity to the station. further information on each mode's without provision).

anges.

urther information on each mode's vithout provision). Emergency vehicle access

he design and IAP. Refer to Section 2.6:

Interchange Access Plans planning conditions continued

С	ondition	Description	Relevance in the document
	92 ontinued	The Proponent must develop an Interchange Access Plan for each station to inform the final design of transport and access facilities and services, including footpaths, contraffic and road changes, and integration of public domain and transport initiatives around and at each station. The Interchange Access Plan(s) must consider walking ar account:	
		 (j) safety audits, including but not limited to a review of traffic facility and cycle changes to ensure compliance with Austroads design criteria; 	A safety audit is being undertaken for the Stage 1 design and will be used to inform furth
		 (k) final design, infrastructure, management and service measures and the level of access and service to be achieved for all users; and 	Design principles and access and service objectives are detailed in Section 2.0: Interchar
		 (I) the contents of the Interchange Operations and Maintenance Plan (IOMP) and operational management provisions for future operational requirements, including maintenance, security and management responsibilities. 	The IOMP was used to inform operations and maintenance access requirements. Refer to management provisions.
		The Interchange Access Plan(s) must be prepared in consultation with the Traffic and Transport Liaison Group (TTLG) and the Design Review Panel and must be supported by traffic and transport analysis. Where necessary, consultation must also be undertaken with major landholders adjoining station precincts. The Plan(s) must detail a delivery and implementation program which must be provided to and agreed by the Secretary before commencement of permanent aboveground facilities at any station site	This IAP has undergone various levels of consultation with stakeholders including counc in Section 3.0: Consultation. This document also details a program for delivery and implementation of the works requ 10.0: Waterloo - actions. Traffic and transport analysis was undertaken to support the de
E	93	In developing the Interchange Access Plan(s), the Proponent must consider:	
		(a) traffic and accessibility design requirements; and	Traffic and accessibility design requirements were accounted for, including the Disability for Accessible Public Transport and Roads and Maritime Services standards. Refer to Section 2.6: Legislative requirements and applicable guidelines; and Section 10.0
		(b) the Station Design and Precinct Plan(s) required by Condition E101.	The Interchange Access Plan and Station Design and Precinct Plan are being developed Section 2.11: Consideration of Station Design and Precinct Plan.
E	96	The Interchange Access Plan(s) must be reviewed by a qualified traffic and transport professional(s), independent of the detailed design process for the CSSI, having regard to the requirements of this approval.	This IAP is undergoing review by independent traffic and transport professionals from va Refer to Section 3.0: Consultation.

ycleways, passenger facilities, parking, nd cycling catchments and take into

rther development of the IAP.

hange and transfer planning.

r to - Operations, maintenance and

Incil, the TTLG and the DRP, as documented

equired for the interchange, listed in Section design and action plan.

lity Discrimination Act, Disability Standards

10.0: Waterloo - actions.

ed in conjunction with one another. Refer to

n various agencies.





5.0 Regional context

Wellington Street and Cope Street Intersection

5.0 Regional context

5.1 Crows Nest to Waterloo

Sydney Metro will deliver a world-class metro rail system for the people of Sydney. The most obvious benefit will be to people in local communities from Rouse Hill to Bankstown walking to their nearest metro station.

The schematic map below shows metro's role in the context of the wider transport system. Many more people will be able to benefit from fast, accessible, reliable and frequent metro services by travelling to a metro station by bike or other public transport modes.

Providing seamless multi-modal journeys for customers is a key outcome of *Future Transport* Strategy 2056.

In this context, Sydney Metro will deliver interchanges that help achieve this outcome by putting the customer at the centre. Metro's high-frequency service means that there will never be a long wait time when transferring between services. Interchange connectivity combined with high-quality links between rapid and suburban buses will help transform the travel experience and enable


access to more places.

Improved cycling infrastructure will enable easier travel by bike, connecting metro stations to surrounding cycle routes. Each metro station will connect into the surrounding walking and cycling network, and will provide bike parking facilities.

The integration of walking and cycling and public transport will increase metro's accessibility to more people in Sydney, helping to make journeys faster and more reliable and providing greater travel choices to communities.



operations:

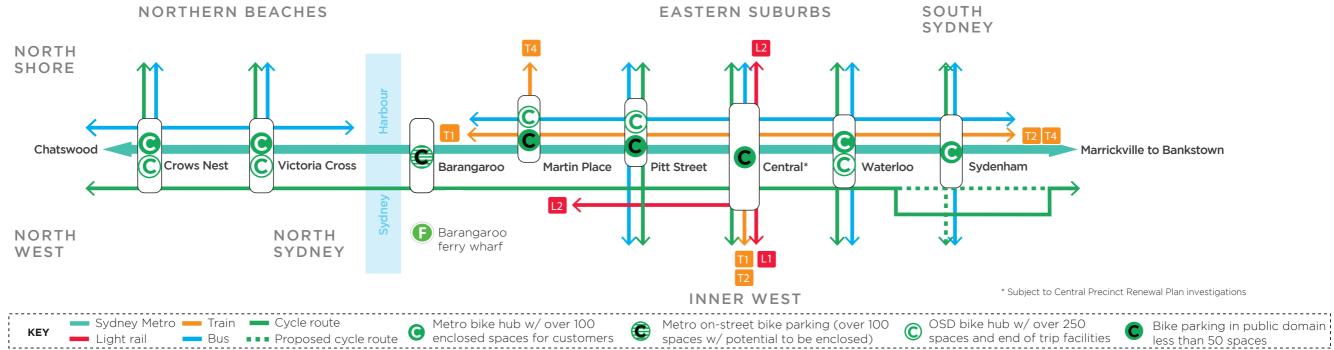

Regional context - Chatswood to Sydenham

5.2 Related projects

The following projects will be either in planning and implementation, or completed and operational when the Sydney Metro City & Southwest commences

Waterloo Estate redevelopment

• Redfern Station upgrade

• More Trains More Services

Regional context continued

5.3 City station bike parking hub strategy

The city station bike parking hub strategy considers the access required for different customer types and how provisions for these customers can be effectively accommodated. The strategy recognises the following unique customer and integrated station development profiles:

- Access provision and long-term bike parking needs associated with interchange customers wanting to access the metro service.
- 2. Access provision and long-term bike parking needs associated with the over station development
- Access provision and short-term bike parking needs associated with the over station development and in some cases customers travelling by metro.
- 4. Spatial provision and consideration of the design flexibility to accommodate shared bike parking schemes as an option for customers, if required.
- 5. Spatial provision and consideration of the station and metro train-sets to enable customer to travel on metro with bikes.


All customer-designated bike parking is aligned with serving customer demand profiles, offering appropriate choices, managing access and network impacts, and enabling potential growth in the typical station catchment size. The strategy consolidates customer bike parking provision at select station locations situated on approaches to the core area of the Sydney CBD. These locations offer customers choices that are well connected to the bike network and:

- avoid areas with high activity levels and conflict
- have the spatial availability to accommodate an enclosed bike parking hub
- offer opportunities for activation and community support.

These key elements contribute towards the design and future delivery of approximately 1,000 bike parking spaces for city station customers with approximately 70 per cent of these situated at four nominated bike parking hubs.

More than 3,000 bike parking spaces have also been allocated within five over station developments along the city section of the Sydney Metro City & Southwest corridor. Designated bike parking space provisions at the over station development directly aligns with a high Greenstar building rating and Council's Development Control Plan (DCP).

Promoting cycling through this hub concept is only one part of the Sydney Metro's contribution to access and travel by cycling. These facilities, together with the fast and frequent metro services, help minimise car parking provision at these strategic and highly constrained nodes and the likely knock-on effects to the network.

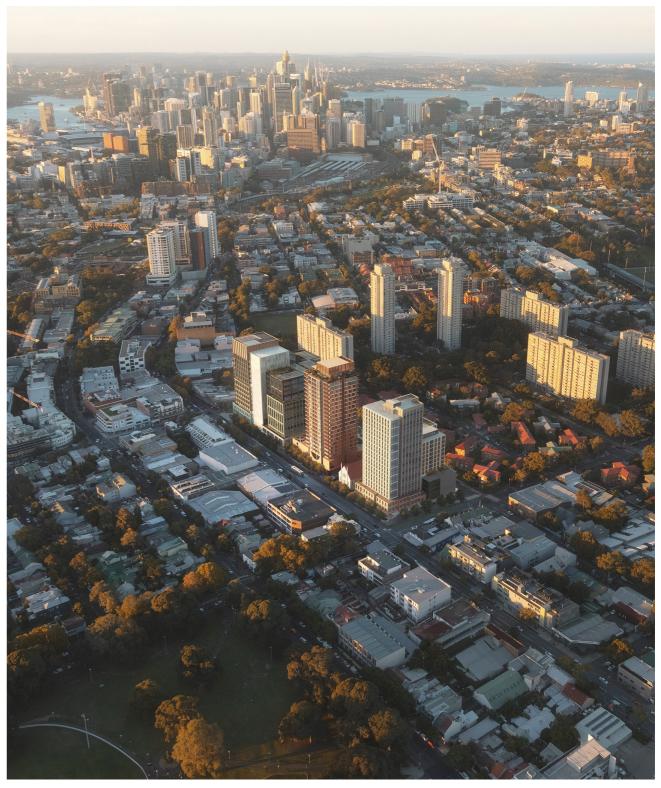

Context of Waterloo Station and Waterloo Metro Quarter





6.0 Waterloo – local context



6.0 Waterloo - local context


6.1 Station interchange enhancements

Waterloo Station is a new underground station in the heart of the Waterloo precinct. The new Waterloo Station will help to revitalise the Waterloo precinct and support the extension of the Sydney Central Business Disctrict (CBD).

Waterloo Station will have two entrances. It will be accessible from Raglan Street near the corner of Cope Street and midblock on Cope Street, as shown on the following map. The station entrances will be connected to commercial, community and residential facilities in Waterloo.

Waterloo Station will be a catalyst for a transformation program to regenerate social housing stock, support greater residential development and urban renewal.

Waterloo Station creates a new public transport catchment whilst interfacing with the nearby transport interchanges, including Green Square and Redfern stations.

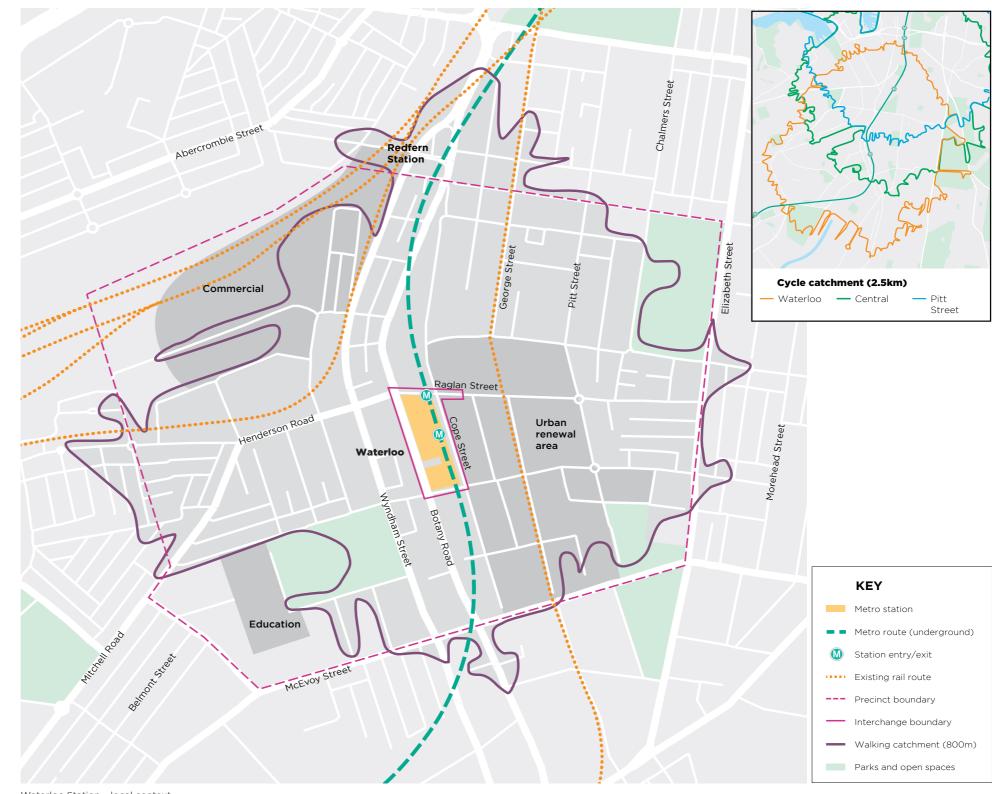

Waterloo Station - local context

Waterloo - local context continued

6.2 Station strategy

The station strategy for Waterloo is to:

- Provide easy, safe and intuitive transfer to and from the metro station within the transport network and road environment.
- Contribute to the sense of place and public domain.
- Integrate the station with local improvement plans.

The table to the right summarises the Waterloo Station's overall features, including the interchange area's key attractions.

Feature	Description
Location	Underground, between Botany Road, Cope Street, Raglan Street and Wellington Street.
LGA	City of Sydney.
Station entry	 Corner of Raglan and Cope streets Mid-block on Cope Street
Transport interchange	Walking, cycling, bus, taxi and kiss-and-ride.
Main features and traffic arrangements	 New pedestrian crossings on Raglan and Cope streets. New taxi, kiss-and-ride bays and bike parking. New on-road marked cycle link on Wellington Street. Existing bus stops retained northbound along Botany Road. Relocation of the bus stops southbound, mid-block on Botany Road between Raglan and Wellington streets.
Customers	Residential, education, and commercial precincts.
Key attractions	 Alexandria Park Alexandria Park Community School South Eveleigh Green Square National Centre for Indigenous

- Excellence
- Redfern Oval
- Redfern Park

6.3 Over station development strategy

The following principles will apply to the integration of the over station development and the metro station:

• All access points (entries, driveways, etc.) to the over station development will be managed and designed to not conflict with station access and interchange facilities.

The design should allow for shared loading dock and maintenance bays with the station and/or surrounding development.

6.4 Modes without provision

There is no design provision considered for the following modes at Waterloo:

- Rail
- Light rail
- Ferry
- Coach
- Park and ride

6.5 Current land use and characteristics

Waterloo Station will be located between Botany Road, and Cope, Raglan and Wellington streets. A station entry will be on the corner of Cope and Raglan streets,

To the north is a commercial and mixed-use area leading to Redfern Station. To the east is a low- to medium-density residential area leading to Moore Park.

To the west and south are lower-density residential and mixed-use areas, including South Eveleigh and public recreation areas such as Alexandria Park.

needs

Waterloo Station will support state and local strategic and planning controls by enabling opportunities for urban renewal including housing diversification and intensification, meeting the needs of residents, workers and visitors.

benefits:

The station will enable further development of the area as a mixed-use centre with strong public transport links to the Sydney CBD and other centres throughout the Eastern Economic Corridor.

The station will provide opportunities to increase residential density within walking distance from the station.

These future changes and opportunities will be further developed in consultation with the Department of Planning, Industry and Environment, INSW, City of Sydney Council and other relevant agencies.

6.6 Future changes and functional

Land use and transport integration

The Waterloo Station precinct is identified as a priority area by Infrastructure NSW (INSW), the precinct will experience progressive renewal of the social housing estate to create a vibrant and more sutainable community.

Waterloo Station is expected to provide the following

The station will form part of the interchange that provides safe and direct access to the existing employment area, and could deliver a significant number of jobs in an area with high levels of amenity, recreation and access to public transport.

The station will provide further incentive for the progressive renewal of the ageing Waterloo social housing estate, including a mix of private, affordable and social housing.

Waterloo - local context continued

Future metro demand and modal transfer splits

The demand and mode split data presented in the two pie charts present a broad level understanding of the functional role of the metro service at Waterloo Station. The 2036 AM peak hour demand profile and customer connectivity profiles present the following characteristics:

- Boardings will be higher than alightings during the AM peak
- Walking is the dominant mode share for egress and access in the AM peak
- Connectivity between metro platforms and bus

services is equally important for customers boarding and alighting metro services in the AM peak

- Kiss-and-ride represents a small proportion of the total demand generated by customers boarding Metro services
- These observed trends are likely to be reversed in the PM peak.

Pedestrian through-site links and footpath widening in the Waterloo Metro Quarter block play a vital role in supporting station access and egress to these connecting transport modes.

38% Rus TOTAL 4,300 Walking 62%

6.7 Opportunities and constraints

Waterloo Station has the following opportunities and constraints.

Constraints

• Waterloo Station can support state and local government plans to redevelop the area

Opportunities


- A well-designed station with public amenities can contribute to the sense of place (community) and public domain
- High demand at Green Square and Redfern stations suggest high public transport usage in the area and a metro alternative can relieve customer congestion at these stations
- Increase permeability through providing new pedestrian through-site links
- Flat topography and high-density catchment which is conducive to a high cycling mode-share
- Increase tree canopy coverage on Botany Road to support a more attractive pedestrian environment


- Botany Road lacks attractive pedestrian environment with most businesses providing parking at their entrance
- Footpath quality varies throughout Waterloo, with low quality footpath in some areas
- Traffic congestion impacts bus service reliability
- Some key intersections in Waterloo lack priority for pedestrians (long wait time)
- Footpaths are constrained by built form and high traffic volumes (particularly Botany Road) which creates a barrier for pedestrian access.

2036 3.5-hour AM peak demand and mode splits

Forecast modes of egress

(PTPM4.1 City and Southwest Final Business Case 2026 and 2036 Project LUTI Scenarios (Run 143 and Run 144)) Note: The cyclist transfer volumes are not shown as they aren't included in the PTPM model

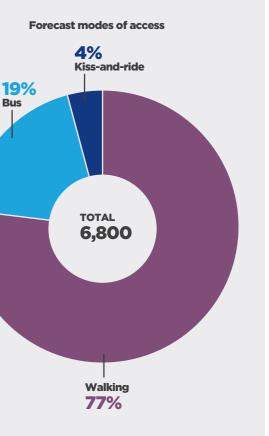

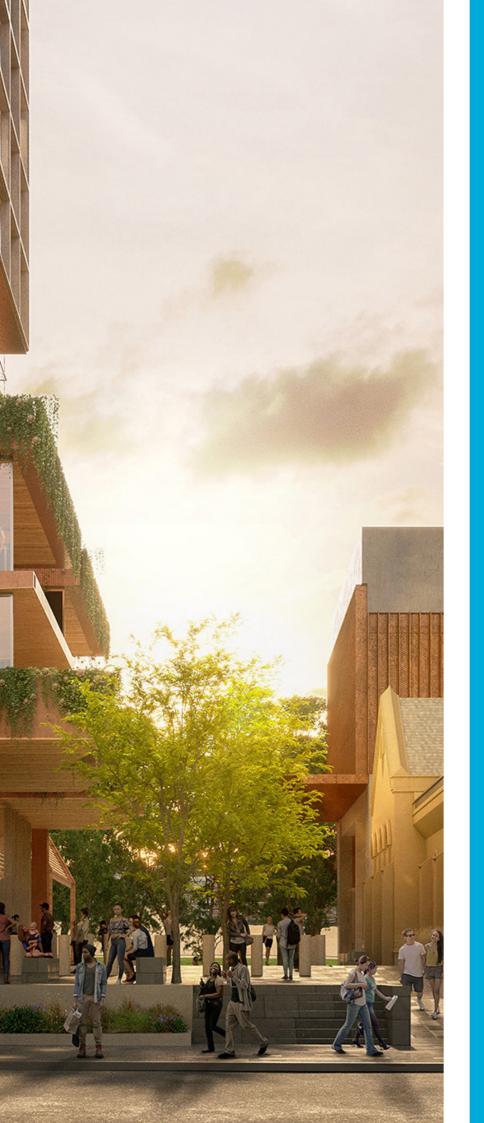



7.0 Waterloo – interchange and transfer requirements overview

Church Yard



7.0 Waterloo - interchange and transfer requirements overview

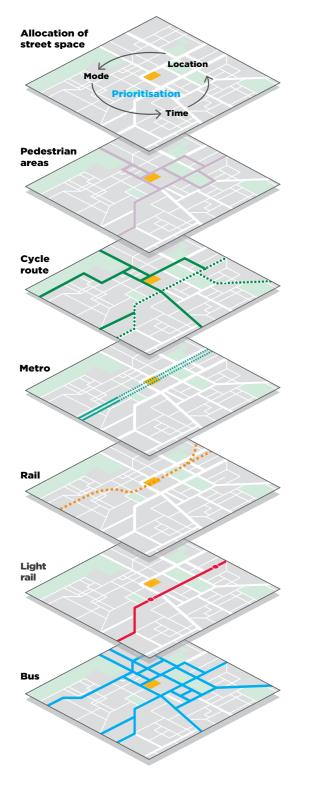

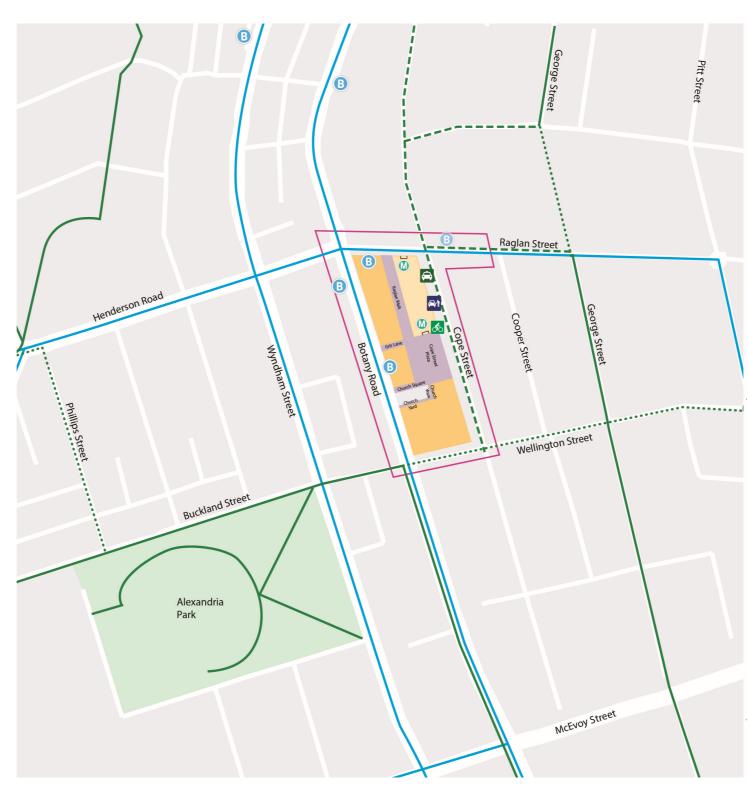


Note: the bike parking location is being investigated and is to be confirmed. Waterloo Station – interchange and transfer requirements overview

Mode layers



7.1 Waterloo – walking interchange and transfer requirements

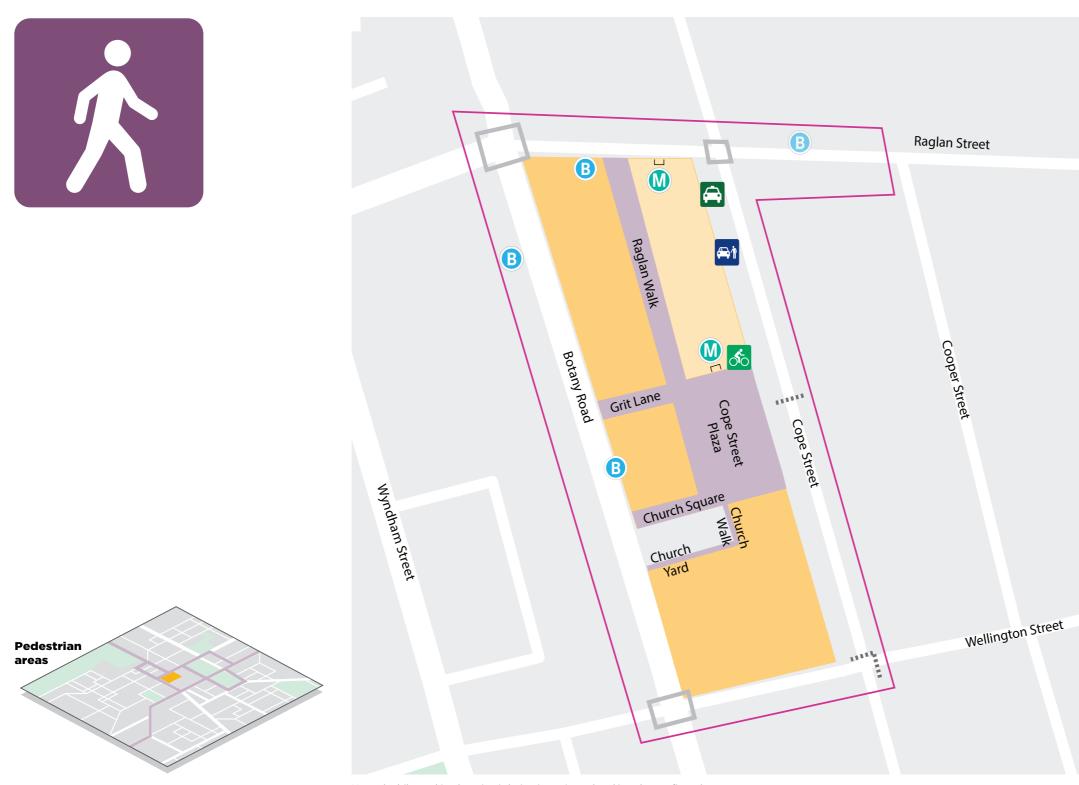

Mode layers

Note: the bike parking location is being investigated and is to be confirmed. Waterloo Station - pedestrian interchange and transfer requirements



Waterloo - walking interchange and transfer requirements continued

Description	
 The pedestrian network surrounding the site is well served by an existing network of footpaths Pedestrian refuges are located on all arms of the roundabouts at Cope and Raglan streets and Botany Road and Raglan Street, and Botany Road and Wellington Street. 	
 The station supports two access points, which require safe, convenient and direct pedestrian re- The access will be via the corner of Raglan Street and Cope Street as well as a mid-block entry 	
 The interchange area's overall environment should accommodate pedestrian movements associate social housing to the east, including new commercial, retail and eateries. The pedestrian environment potentially impacted by the proposed station includes station account of the proposed station account of	
 The design should ensure that transfer between modes within the interchange area allows for a Allow for customer access through a combined plaza function for access to metro and other Provide for high pedestrian movement across Raglan Street and across Cope Street. 	
 Safe, convenient, efficient and sufficient pedestrian access and transfer to and from the station and between transport modes was developed through the design process and supported through various documents including: Urban design and road design reports Pedestrian modeling reports A road safety audit Technical notes supporting Works Authorisation Deeds (WADs). Waterloo Station Design and Precinct Plan 	 Transport and pedestrian analyses were used to provabove, which enable the following outcomes: Sufficient public domain and footpath space to accord the station. Safe pedestrian crossings (signalised and zebra) at on Cope Street which provide direct paths of travel All outcomes were designed to comply with relevant Disability Discrimination Act, DSAPT and Austroads get
 Class B bike parking facility within close proximity to the station entry Class C bike racks outside of the station entry adjacent to the footpaths. 	
• The station will provide easy transfer to bus stops on Botany Road and Raglan Street.	
• The station will provide easy access to the taxi rank on the west side of Cope Street, south of Ra	aglan Street.
• The station will provide easy access to proposed on-street kiss-and-ride zone on west side of Co	ope Street, south of Raglan Street.
 Four signalised pedestrian crossings at the intersection of Cope and Raglan streets. Two new pedestrian zebra crossings at the intersection of Cope and Wellington streets (north at Mid-block zebra crossing on Cope Street between Raglan and Wellington streets near the proper Widening of the signalised pedestrian crossing across Botany Road at the south and north approx Through-site links in the Metro Quarter block Footpath widening on all of the footpaths on the station side of the roadways surrounding the signalised pedestrian crossing across Botany Road at the south and north approx 	osed entrance. oach to the intersection with Raglan Street and Hendersc
	 The pedestrian network surrounding the site is well served by an existing network of footpaths Pedestrian refuges are located on all arms of the roundabouts at Cope and Raglan streets and Botany Road and Raglan Street, and Botany Road and Wellington Street. The station supports two access points, which require safe, convenient and direct pedestrian not the access will be via the corner of Raglan Street and Cope Street as well as a mid-block entry The interchange area's overall environment should accommodate pedestrian movements associated housing to the east, including new commercial, retail and eateries. The pedestrian environment potentially impacted by the proposed station includes station acces hallow for customer access through a combined plaza function for access to metro and othe Provide for high pedestrian movement across Raglan Street and across Cope Street. Safe, convenient, efficient and sufficient pedestrian access and transfer to and from the station and between transport modes was developed through the design process and supported through various documents including: Urban design and road design reports Pedestrian modeling reports A road safety audit Technical notes supporting Works Authorisation Deeds (WADs). Waterloo Station Design and Precinct Plan Class B bike parking facility within close proximity to the station entry Class C bike racks outside of the station entry adjacent to the footpaths. The station will provide easy access to proposed on-street kiss-and-ride zone on west side of Cope Four signalised pedestrian cossings at the intersection of Cope and Raglan streets. Two new pedestrian crossings at the intersection of Cope and Raglan streets. Two new pedestrian crossings at the intersection of Cope and Wellington streets (north a Mid-block zebra crossing on Cope Street between Raglan and Wellington streets north a portion of the signalis

facilities are located at the intersections of

e north, west and south, and regenerated

ss should:

ovide the high quality provisions identified

ccommodate pedestrian flows in the vicinity

at surrounding intersections and mid-block vel along pedestrian desire lines.

nt legislation and guidelines such as the s guides

rson Road.

Waterloo - walking interchange and transfer requirements continued

Pedestrian access



Pedestrian egress




Note: the bike parking location is being investigated and is to be confirmed.

Note: the bike parking location is being investigated and is to be confirmed.


Allocation of space changes in the Waterloo Metro Quarter Block

2017 Configuration



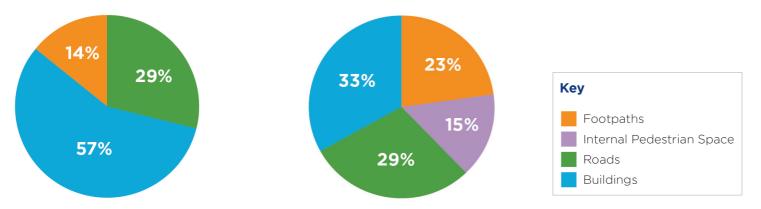


7.2 Waterloo – cycling interchange and transfer requirements

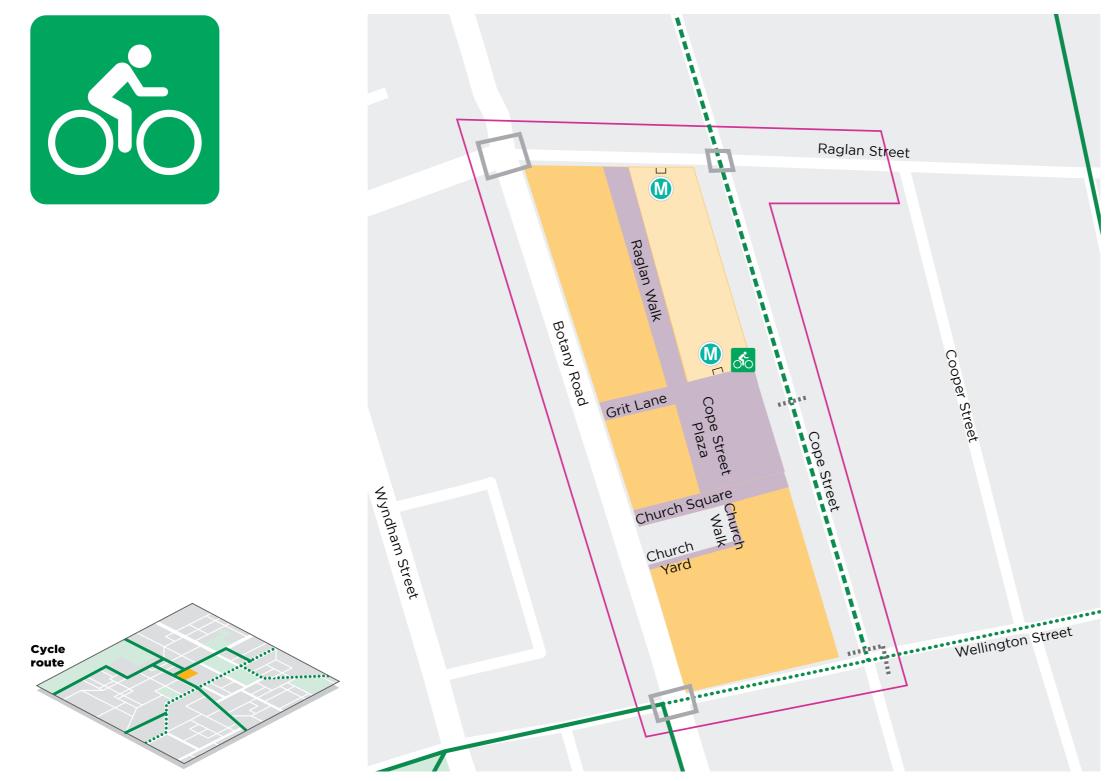

Mode layers

Note: the bike parking location is being investigated and is to be confirmed. Waterloo Station - cycling interchange and transfer requirements

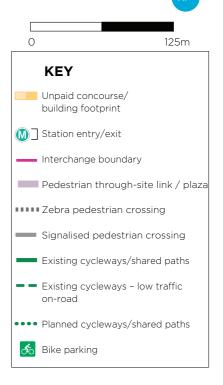

Waterloo - cycling interchange and transfer requirements continued

Item	Description	
Current state		
Current levels of access and service	 The station is located close to the following existing cycleways: George Street north-south strategic cycleway - separated bi-directional on-road cycleway. Wellington Street east-west on-road cycle route to the south of the station. The station and interchange will be designed to allow bicycles to connect with and move throug 	h the precinct and be able to board Sydney Metro service
Future station integration		
Bike parking location principles	 Entry/access to bike parking at street level should be convenient, easily visible and intuitive for Bike parking should be on the main desire line of the cycle network where feasible. Bike parking and vehicle parking locations and access arrangements should be separated (i.e. 	
Bike parking location requirements	 Bike parking located within close proximity to the station entrance and the cycle network. Bike facilities designed in accordance with Australian Standards and Austroad Guidelines. 	
Bike parking facilities provision	 Approximately 280 bicycle parking spaces within the interchange (breakdown below). Safeguarded additional bike parking spaces in the station precinct, as needed. 	
Types of parking facilities	Class B bike parking for approximately 200 bicycles.Class C bike parking for 80 bicycles.	
Safe, convenient, efficient and sufficient cycling access outcome	 Safe, convenient, efficient and sufficient cycling access to and from the station and between transport modes was developed through the design process and supported through various documents including: Urban design and road design reports A road safety audit Technical notes supporting Works Authorisation Deeds (WADs). The City of Sydney Cycling Strategy and Action Plan 	 Transport analyses were used to provide the high quarenable the following outcomes: Cycle parking facilities (Class B and Class C) situated plazas with efficient access to cycle routes Safe and efficient integration with existing and propic ouncil strategies with Cope Street and Wellington broader cycle network. Controlled (signalised) or separated direct paths of minimise vehicle-cyclist conflict.
New cycle routes by Sydney Metro	 Bi-directional cycleway on Wellington Street, between Botany Road and Cope Street Cope Street mixed traffic road for cyclist access to the station 	
New cycle routes by others	Bi-directional cycleway on Wellington Street, between Cope Street and George Street	

ices.


uality provisions identified above, which

ted in convenient locations in the station

oposed cycle networks in alignment with In Street providing cycle access to the


of travel along key cyclist desire lines to

7.3 Waterloo – bus interchange and transfer requirements

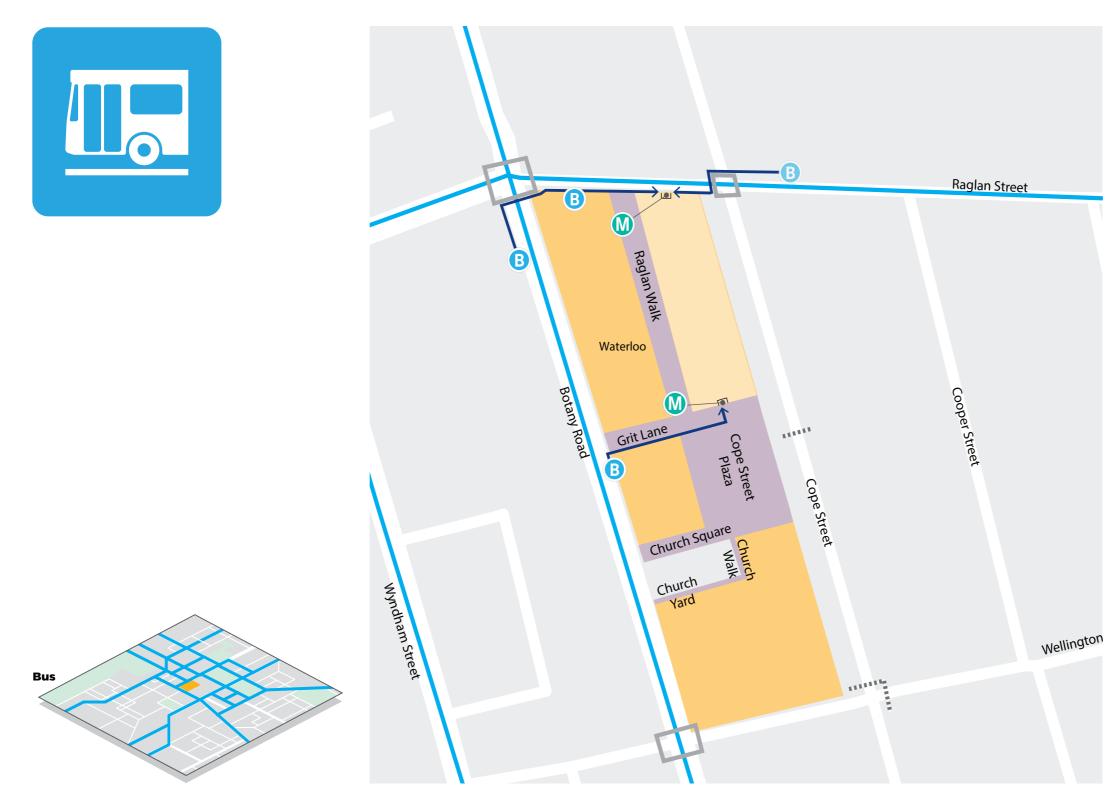

Mode layers

Waterloo Station - bus interchange and transfer requirements

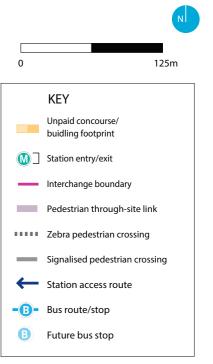

Waterloo - bus interchange and transfer requirements continued

Item	Description	
Current state		
Current levels of access and service	A number of bus routes operate outside of Waterloo Station along Botany connecting to t Street and Raglan Street.	he northern and southern suburbs. A local bus route
Future station integration		
Bus stop location principle	Bus services shall be easily and visibly accessible from the station entrance, located as close as fe	easible to the gateline
Bus bays principle	Bus bays provided or modified by the project will be designed in accordance with relevant Austr	alian Standards, Austroads Guidelines and NSW Govern
Transfer to and from bus principle	Customers will be able to transfer between bus stops at metro station entries using existing foot signage, crossings and wayfinding to ensure an easy customer transfer.	paths and new pedestrian through-site links. Where nece
Safe, convenient, efficient and sufficient access and transfer outcome	 Safe, convenient, efficient and sufficient pedestrian access and transfer to and from the station and between transport modes was developed through the design process and supported through various documents including: Urban design and road design reports Pedestrian modeling reports A road safety audit Technical notes supporting Works Authorisation Deeds (WADs). Waterloo Station Design and Precinct Plan 	 Transport and pedestrian analyses were used to provabove, which enable the following outcomes: Sufficient public domain and footpath space to access stations to bus stops including queuing space at the Controlled (signalised), direct paths of travel along interchange areas including the 'Grit Lane' link provistop on Botany Road. New bus stops being provided within close proximientrance on Raglan Street. Weather shelter at bus stops All outcomes were designed to comply with relevant Disability Discrimination Act, DSAPT and Austroads get
Transfer to and from bus (overnight) provision	Regular bus stops on Botany Road will be used for overnight bus operations.	
Transfer to and from bus (school) provision	No design provision is considered for this location.	
Changes to bus stops/route provision	 Relocation of Cope Street stops, streamlining east-west bus services to either Raglan Street or Relocation of the southbound stop on Botany Road to mid-block between Wellington and Rag 	
New bus stops/routes provision	 Botany Road - one stop, northbound, south of Raglan Street. Botany Road - one stop, southbound, mid-block between Raglan Street and Wellington Street Raglan Street - one stop, eastbound, mid-block between Cope Street and Cooper Street Raglan Street - one stop, westbound, mid-block between Cope Street and Cooper Street (pote Raglan Street - one stop, westbound, east of Botany Road 	

te operates along Cope Street, Wellington

rnment Technical Directives.

ecessary, improvements will be made to

ovide the high quality provisions identified

- ccommodate pedestrian flows from the the bus stops.
- ng key pedestrian desire lines to bus oviding direct access to the southbound bus

mity with the new stop outside the station

nt legislation and guidelines such as the s guides

7.4 Waterloo – vehicle drop-off interchange and transfer requirements




Waterloo Station - vehicle drop-off interchange and transfer requirements



Waterloo - vehicle drop-off interchange and transfer requirements continued

Item	Description
Current state	
Current levels of access and service	There are no existing taxi ranks near the station. There are no existing kiss-and-ride or park-and-ride facilities.
Future station integration	
Safe, convenient, efficient and sufficient access and transfer	Ensure the safety of pedestrians and protect them from other road users by providing: Safe integration with existing networks. Low speed environment on Cope Street No crossing of roads required to access taxi ranks or kiss and ride bays
Transfer to and from taxi	New taxi ranks at Cope Street, near Raglan Street.
Taxi rank locations	Multi-purpose ranks that service local centres as well as stations are supported as long as they are located within 100 metres of the station access point.
Transfer to and from kiss-and-ride	Kiss-and-ride zones at west side of Cope Street - south of Raglan Street.
Kiss-and-ride zone design	The dimensions of kiss-and-ride spaces shall comply with TfNSW and Australian Standards and Guidelines.




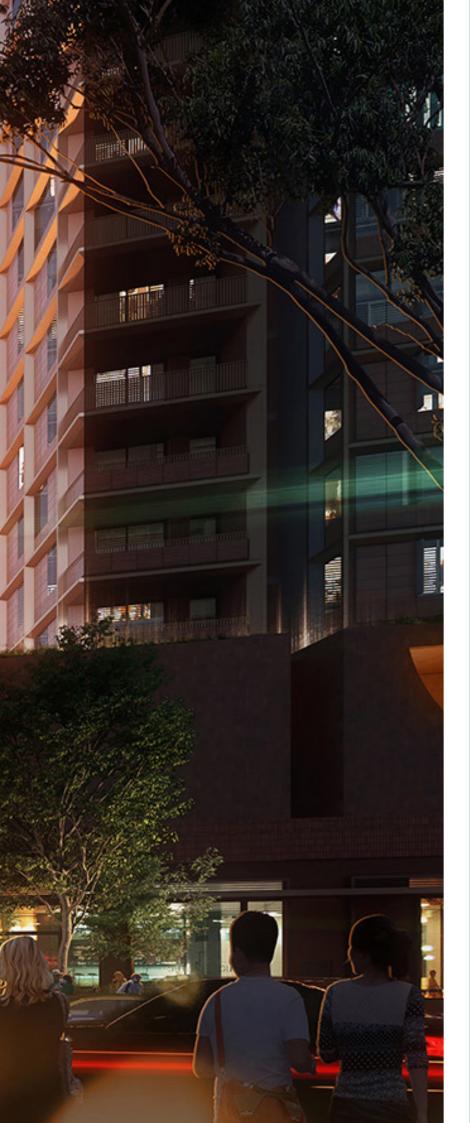

8.0 Waterloo – operations, maintenance and management provisions

8.0 Waterloo - operations, maintenance and management provisions

The spatial plan of the Waterloo station and interchange provides a broad understanding of the future station infrastructure and interchange facilities and its interfaces and integration planned by the Sydney Metro project. This includes new streets and interfaces with the existing street network. The new interchange will increase permeability between Cope Street and Botany Street, whilst providing new connections through the new precinct and to the new station entrances.

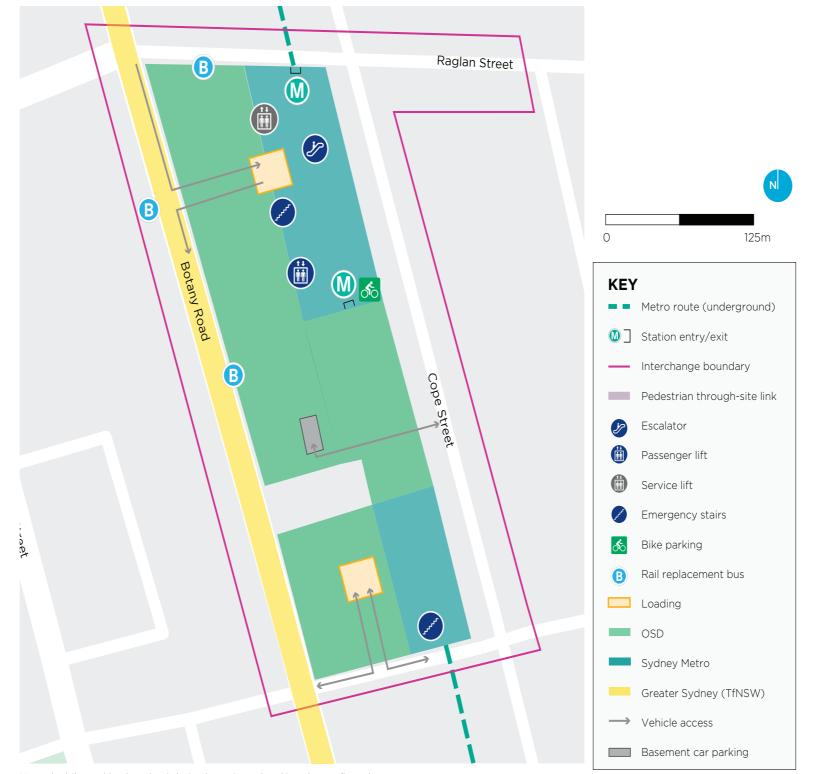

Note: the bike parking location is being investigated and is to be confirmed. Waterloo Station - operations, maintenance and management provisions



Waterloo - operations, maintenance and management provisions continued

8.1 Reviews and assessment process

A performance review of the station facilities, vertical transport provision, footpaths and intersections has been undertaken using both pedestrian and traffic static analytical and simulation modelling tools. The outputs from the models have been used to understand the operating performance of the interchange, points of conflict and potential deficiencies, and to inform the design development process.

An overview of the process for assessing the proposed interchange design is provided in the below figure.

Review

nal

ō

Operat

iew	Identify interchange role and function
l Revi	Infrastructure and service identification - current and future
Planning Review	Demand review (including future and identification of key movement patterns)
	Identify conflict points and opportunities for efficient connections
Spatial	Manage conflict through locational planning and connectivity

Review customer needs with a focus on safety and movement performance Identify minimum spatial capacity needs for key movements Review movement

against spatial capacity provision and identification of network pinchpoints Plan for efficient movement through identification of Day One and staging to support infrastructure and operational enhancements Pedestrian analysis of peak metro station operational impacts on the interchange and adjacent transport network Peak operational review of pinchpoints Inform staging and infrastructure provision

infrastructure provision review

8.2 Facility Testing Process

The performance of the design was tested through the application of the following assessment techniques.

Demand Profile	Design Testing	Measure	Review Type
Peak hour	Infrastructure and spatial provision	Level of Service (LoS)	Design capacity
Peak 15 minutes (average)	Peak infrastructure and spatial provision	LoS	Peak design capacity
Peak minute (surge)	Customer experience	LoS & duration	Operational experience
The above three levels of testing enables a design to be reviewed against both standard peak capacity		provides a measure to de infrastructure to accomm	

be reviewed against both standard peak capacity applications and to understand how infrastructure performs under more short term demand surges relating to the operation of the system or the surrounding transport network.


An assessment against the peak 15 minute period

8.3 Interchange operational provisions

The following table summarises the operational provisions at Waterloo Station.

Item	Description
Safe access	Ensure the safety of:
	 Maintenance workers and staff, and protect them from other road users by providing safe exclusion zones.
	 Pedestrians and protect them from service vehicles and working equipment.
Emergency vehicle access	Kerbside parking in the vicinity of the station should be managed to accommodate emergency vehicles.
Servicing and maintenance access (day-to-day)	Will be within the over station development - see reference design for provision.
Servicing and maintenance access (major)	Will be within the over station development - see reference design for provision.
Rail replacement bus service access	Rail replacement buses will use the existing bus zone on Botany Road.
Delivery access (retail and operational)	Will be within the over station development - see reference design for provision.
Staff car parking	As staff will be encouraged to travel by public transport or active transport, no designated car parking for staff will be required.
Interchange Operation and Maintenance Plan (IOMP)	The IOMP documents the assets within the interchange and who is responsible for their operation and maintenance.

provides a measure to determine required infrastructure to accommodate forecast peak demand. While assessment of the peak minute demand provides further insight into customer experience during peak surges from train arrivals and similar events associated with network operations.

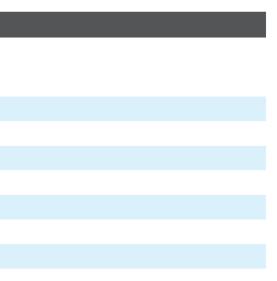





9.0 Modal Hierarchy Review



45

9.0 Modal Hierarchy Review

The interchange has been designed to prioritise access following the transport modal hierarchy design principles. Adopting these principles in the Waterloo Station design will help manage existing conflict, provide safer and efficient access and improve amenity and connectivity for customers moving through the interchange, so that the station can support continued growth.

This table lists the considerations and benefits of interchange access enhancements and the modal access hierarchy provision for Waterloo Station.

Mode Pedestrian	 Provision Through-site links connecting Botany Road, Cope Street and 	Consideration and BenefitThrough-site links help make the interchange area more walkable. They help inc
Pedestrian		• Through-site links help make the interchange area more walkable. They help inc
	 Raglan Street Pedestrian crossings on Cope Street and all corners surrounding the station 	 all directions, seamlessly integrating it with the surrounding places. Two through Street, connecting commercial areas to the west of the station with residential a from Raglan Street also allows easy movement between metro entrances, bike The crossings will provide for safe and efficient pedestrian access to the Waterl Street which has been designed to priortise walking, cycling and slow-moving low Widening of crossings at Botany Road and Raglan Street increasing capacity of Footpath widening on all footpaths surrounding the Metro Quarter will improve higher pedestrian volumes. Safeguarded mid-block crossing on Botany Road enabling future growth to the
Bike	 Approximately 200 Class B bike parking spaces. Class C bike parking (80 spaces) 	 Bike parking in Waterloo Station forms part of the city station bike parking hub estimated bike parking demand and further encourages cycling as a way to accelection is being investigated but will be within close access to the station entration opening, Cope Street will be designed and intended to operate for local traffic a Street is connected to George Street (to CBD and Green Square) and Buckland recreational areas) cycleways via Wellington Street. This helps integrate Waterle New cycleway on Wellington Street between Botany Road and Cope Street, link infrastructure.
Bus	 Bus stops relocation to either Raglan Street, or Botany Road Overnight bus operations on Botany Road 	• Bus stops relocated from Cope Street and Wellington Street to the northern sic makes buses more visible to metro passengers, facilitating smooth transfers acr on Botany Road allows customers to connect and move through the station via
Taxi, Point to Point and Kiss -and-Ride	 On-street taxi stand on Cope Street On-street kiss and ride zone on Cope Street 	 While metro will provide high-frequency, high-speed public transport network, to important to facilitate last mile connections for those who need it. The provision outside the station building and public plaza. The placement aligns with the inter- prioritises other more sustainable and efficient travel modes.
Loading and servicing	Delivery, service and maintenance access	 The delivery, service and maintenance access is provided within the over station station entrances and bus stops. The back-of-house area is also clustered on both ends of the station to minimise

ncrease Waterloo Station's accessibility from ugh-site links connect Botany Road and Cope al areas to the east. Another through-site link we parking and bus stops.

erloo Station precinct and integrate with Cope I local vehicle access.

of the pedestrian crossing.

ve the pedestrian environment and cater for

he west of Waterloo Station.

b strategy. This provision satisfies the ccess metro services. The Class B bike parking rance.

on-road cycle route. Following metro access only, making it safe for cyclists. Cope d Street (to Alexandria Park and Moore Park rloo Station with the wider cycle network.

nking to existing and future cycling

side of Waterloo Station on Raglan Street across the two modes. The relocated bus stop via the planned 'Grit Lane' through-site link.

, taxi stand and kiss-and-ride zones are still ons are located on the kerb on Cope Street, terchange modal hierarchy principles that

ion development. It is located away from the

ise conflict with passenger movements.



10.0 Waterloo – actions

Cope Street Plaza




47

10.0 Waterloo – actions

The action plan provides an integrated planning response by capturing both Sydney Metro planned project commitments that help to enhance Waterloo Station while recognising other project commitments and investigations. This action plan, together with information contained in Sections 10.1 and 10.2, provides a comprehensive understanding of the continuous planning and staged changes to Waterloo Station. This also shows how the Sydney Metro project contributes and enables improved amenity and connectivity choices, and an easy, safe and seamless customer journey.

Sections 10.1 and 10.2 detail the committed changes and enhancements to the station and interchange facilities, which are separated into two clear implementation plans. Section 10.1 contains the committed implementation plan for Sydney Metro City & Southwest project at Waterloo Station, and Section 10.2 recognises the implementation plans and opportunities to be delivered by other programs. These other changes are recognised by the project to be delivered by other parties and would help enhance and complement the planned works contained in Section 10.1.

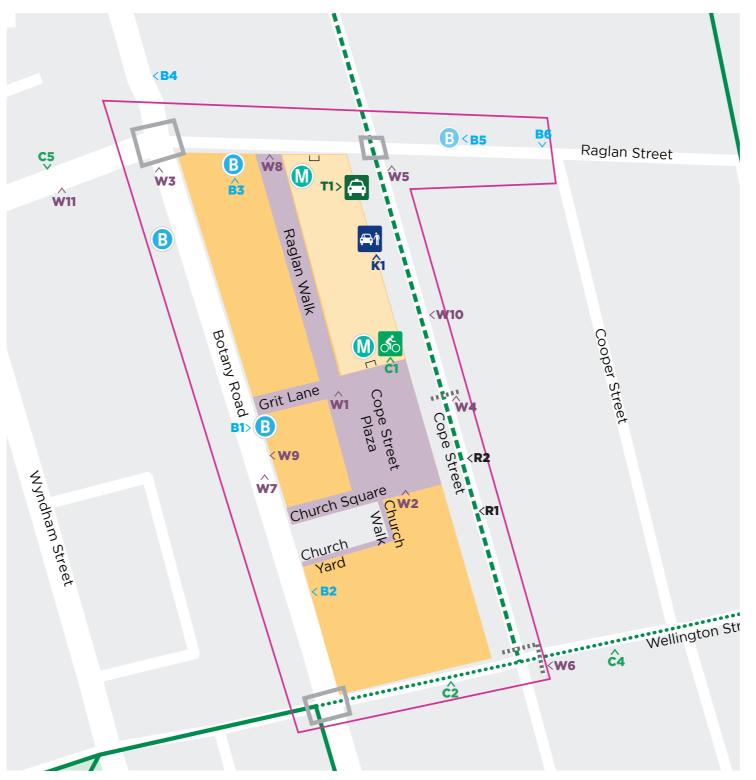

Note: the bike parking location is being investigated and is to be confirmed. Waterloo Station – actions

	N
0	65m
KEY	,
	Unpaid concourse/ buidling footprint
	Station entry/exit
—	Interchange boundary
	Pedestrian through-site link
	Zebra pedestrian crossing
_	Signalised pedestrian crossing
—	Existing cycleways/shared paths
	Existing cycleways - low traffic on-road
••••	Planned cycleways/shared paths
ీం	Bike parking
B	Bus stop
B	Future bus stop
	Taxi rank
A t	Kiss-and-ride

10.1 - Waterloo - City & Southwest Delivery & Implementation Program

This Interchange Access Plan sets out the intended design and operating outcomes required for customers to achieve an easy, safe and seamless transfer between modes at Waterloo Station. A number of actions have been identified to support these outcomes, and are summarised below.

Walki W1			(start to finish)
W1			
	Provide a through-site pedestrian link from Cope Street and Botany Road that provides a convenient connection from Waterloo Station to the southbound bus stop.	Sydney Metro	2021-2024
W2	Provide a secondary through-site pedestrian link from Cope Street and Raglan Street which supports connectivity from the Waterloo Estate to the bus stops.	Sydney Metro	2021-2024
W3	Widen the pedestrian crossings at the Botany Road/Raglan Street intersection southern and northern approaches.	Sydney Metro	2021-2024
W4	Provide a mid-block zebra pedestrian crossing on Cope Street between Raglan Street and Wellington Street.	Sydney Metro	2021-2024
W5	Provide a signalised pedestrian crossing at the Cope Street and Raglan Street intersection on all legs.	Sydney Metro	2021-2024
W6	Provide a pedestrian crossing at the Cope Street and Wellington Street intersection on the eastern and northern approaches.	Sydney Metro	2021-2024
W7.1	Safeguard a mid-block pedestrian crossing on Botany Road between Raglan Street and Wellington Street on the eastern side of Botany Road.	Sydney Metro	2021-2024
W8	Widen the footpath on the southern side of Raglan Street between Botany Road and Cope Street.	Sydney Metro	2021-2024
W9	Provide adequate building setback on Botany Road in the area around the bus zone to provide additional pedestrian capacity and to support place-making.	Sydney Metro	2021-2024
W10	Widen the footpath on Cope Street between Raglan Street and Wellington Street (western side).	Sydney Metro	2021-2024
Cyclir	g		
C1.1	Provide approximately 200 Class B bike parking spaces and investigate a suitable location for Class B bike parking in the station precinct.	Sydney Metro	2021-2024
C1.2	Provide bike rails (Class C) for a minimum of 80 bike parking spaces.	Sydney Metro	2021-2024
C2	Provide a separated cycleway (conventional running) along Wellington Street between Botany Road and Cope Street.	Sydney Metro	2021-2024
С3	Safeguard for additional bike parking in the station precinct, should demand warrant the bike parking.	Sydney Metro	2021-2024
Bus			
B1	Provide a southbound bus stop mid-block on Botany Road between Raglan Street and Wellington Street.	Sydney Metro	2021-2024
B2	Remove the southbound bus stop on Botany Road north of Wellington Street.	Sydney Metro	2021-2024
B3	Provide a bus stop on the southern side of Raglan Street between Botany Road and Cope Street.	Sydney Metro	2021-2024
B4	Remove the southbound bus stop on Botany Road north of Raglan Street.	Sydney Metro	2021-2024
Taxi			
Т1	Provide a taxi rank on Cope Street for two bays.	Sydney Metro	2021-2024
Kiss-a	nd-ride		
K1	Provide a kiss-and-ride zones for four bays on Cope Street.	Sydney Metro	2021-2024
Road	network modifications		
R1	Provide traffic calming measures on Cope Street to encourage traffic to travel at a lower speed.	Sydney Metro	2021-2024
R2	Investigate Cope Street kerb side use to optimise place-making and station pedestrian access outcomes.	Sydney Metro, Land & Housing Commission, TfNSW	2024-2028

OM1 Prepare an Interchange Operations and Maintenance Plan (IOMP) in accordance to the Interchange Operations and Maintenance Framework to allocate clear responsibility for all Sydney Metro aspects of day-to-day running of the interchange, and to ensure that nominated infrastructure and assets in the interchange are monitored and maintained to a high standard.

2021-2024

10.2 Waterloo - Other Implementation Plans

A number of items are to be delivered by stakeholders as part of other projects or have been identified for further investigation as a means to achieve additional improvements beyond those delivered by the Sydney Metro City & Southwest project at Waterloo Station.

These investigation items will inform delivery programs carried out by stakeholders as part of other projects and will enable the progressive improvement of the wider Waterloo Station precinct. These items are complementary and their delivery is not required for the operation of Sydney Metro at Waterloo Station.

Due to their proximity to Waterloo Station, the complementary items and investigations are listed in the table below to help understand their contribution and integration with wider area planning goals.

Acti	n	Delivered by	Timing (start to finish)		
Wall	ing				
W7.2	Safeguard a mid-block pedestrian crossing on Botany Road between Raglan Street and Wellington Street on the western side of Botany Road.	Transport for NSW	2021-2030		
W11	Progress pedestrian path improvements to South Eveleigh including pedestrian wait times at intersections.	Transport for NSW	2021-2024		
Cycl	ng				
C4	Investigate a cycleway along Wellington Street between Cope Street and George Street.	City of Sydney, Land & Housing Commission	After Sydney Metro opens		
C5	Investigate extending the cycling connection on Henderson Road to the George Street cycleway.	Transport for NSW and City of Sydney	2021-2030		
Bus					
B5	Provide a bus stop on the northern side of Raglan Street within close proximity to Waterloo Station.	Transport for NSW, Land & Housing Commission	2021-2028		
B6	Reroute bus services from Wellington Street to Raglan Street.	Transport for NSW	2021-2024		
B7.1	Review bus route services and frequencies to provide easy access to the station from the surrounding bus catchment.	Transport for NSW	2021-2024		
B7.2	Implement recommended bus route and timetable services changes from B7.1.	Transport for NSW	2021-2024		
B8	Investigate bus priority on the road network for bus corridors connecting with Waterloo Station.	Transport for NSW	2021-2024		
Road	Road network modifications				
R3	Excluding Botany Road, implement 40km/h speed limit on all streets surrounding the Botany Road precinct.WW	City of Sydney, Transport for NSW cluster	2021-2024		

Contact us

- (1800 171 386 Community information line open 24 hours
- sydneymetro@transport.nsw.gov.au
- Sydney Metro City & Southwest, PO Box K659, Haymarket NSW 1240
- () If you need an interpreter, contact TIS National on 131 450 and ask them to call 1800 171

sydneymetro.info